



Induracore G2

ALUMINIUM LAMINATED PANELS

Top Hat Fixing System


Version 2.6
December 2025

CONTENTS


1. Components	4
2. Vertical Panel Joint	5
3. Horizontal Panel Joint	6
4. Inter-storey Joint	7
5. Internal Corner Panel	8
6. External Corner Panel	9
7. Wall To Soffit - A	10
8. Wall To Soffit - B	11
9. Base Detail - A	12
10. Base Detail - B	13
11. Base Detail - C	14
12. Precast Wall - A	15
13. Precast Wall - B	16
14. Precast Wall - C	17
15. Fibre Cement Internal Corner - A	18
16. Fibre Cement Internal Corner - B	19
17. Vertical Profiled Cladding Internal Corner	20
18. Horizontal Profiled Cladding Internal Corner	21
19. Pipe Penetration @ Soffit	22
20. Vertical Profiled Metal Junction	23
21. Parapet Option - A	24
22. Parapet Option - B	25
23. Parapet Option - C	26
24. Parapet Option - D (w/ minimal upstand)	27

CONTENTS


25. Parapet Top Joint	-----	28
26. Fascia To Soffit - A	-----	29
27. Fascia To Soffit - B	-----	30
28. Fascia To Soffit - C	-----	31
29. Fascia To Soffit - D	-----	32
30. Fascia To Soffit - E	-----	33
31. Eyebrow Sill Detail	-----	34
32. Typical Upstand Detail	-----	35
33. Typical Commercial Window Head	-----	36
34. Typical Commercial Window Sill	-----	37
35. Typical Commercial Window Jamb - A	-----	38
36. Typical Commercial Window Jamb - B	-----	39
37. Typical Residential Window Head	-----	40
38. Typical Residential Window Sill	-----	41
39. Typical Residential Window Jamb - A	-----	42
40. Typical Residential Window Jamb - B	-----	43
41. Wall Box Penetration Detail	-----	44
42. Wall Pipe Penetration Detail	-----	45
43. Fin Mounting Detail	-----	46
44. General Differential Movement	-----	47
45. Meter Box Penetration	-----	48
46. Aluminium Stiffener To Induracore G2	-----	49

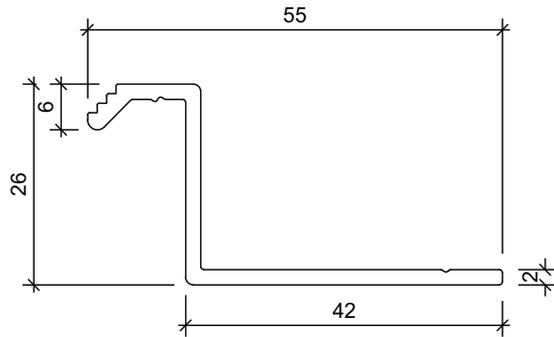

Indurafix High Z-Angle (First Fix)
Alloy & Temper: 6060-T6
Colour: Mill Finish

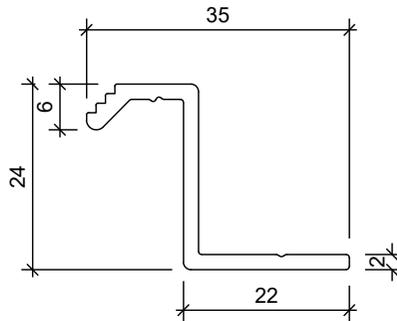


Indurafix Low Z-Angle (Second Fix)
Alloy & Temper: 6060-T6
Colour: Mill Finish

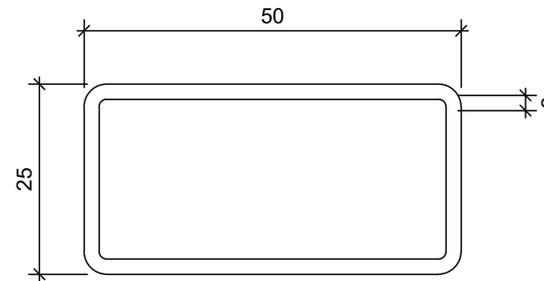


RHS Stiffener 50X25X2mm
Alloy & Temper: 6060-T6
Colour: Mill Finish
Adhesive Glue: Minimum 2mm thick & minimum 50mm wide strip of Sabrebond SMP60
Alignment: Stiffener to be parallel to short edge

Fixing Requirement of First & Second Fix Z-Angle to Top Hat
Proposed Fastener Diameter: 4.88MM Screw
Minimum Aluminium Edge Distance: 7.32MM
For more information refer to the INDURACORE G2 Aluminium Laminated Panels (Top Hat) Engineering Judgement

Fire Cavity Barrier (By Others)
- Ryanfire Intuspan Fire Cavity Barrier or equivalent, where required, to be installed in accordance with C/AS2

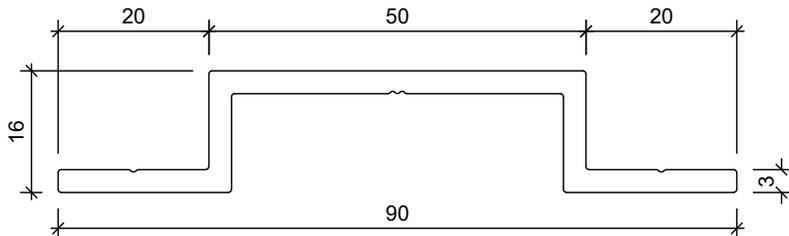


16mm TOP HAT EXTRUSION
Alloy & Temper: 6060-T6
Colour: Mill Finish

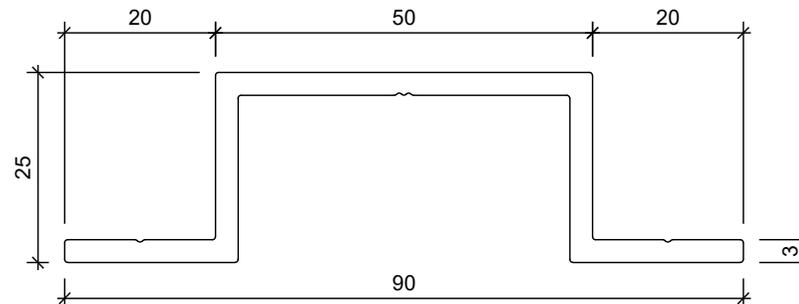


25mm TOP HAT EXTRUSION
Alloy & Temper: 6060-T6
Colour: Mill Finish


- Fixing Requirements**
- Top Hat to Timber Substrate**
Proposed Fastener Diameter: 4.88mmØ
No. of Fastener: 2
Minimum Timber Embedment Depth: 40mm
Minimum Aluminium Edge Distance: 10mm
Minimum Timber Edge Distance: 20mm
 - TopHat to Steel Stud Substrate**
Proposed Fastener Diameter: 5.59mm
No. of Fastener: 2
Minimum Aluminium Edge Distance: 12mm
Minimum Steel Edge Distance: 12mm
 - TopHat to Concrete Substrate**
Proposed Fastener: M6 Hilti HUS4-HR or M6 Anzor AnchorMark G316SS
No. of Fastener: 2
Minimum Concrete Embedment: 55mm
Minimum Concrete Edge Distance: 50mm
Minimum Aluminium Edge Distance: 12mm


For more information refer to the Induracore G2 Aluminium Laminated Panels (Top Hat) Engineering Judgement.
Structure shown on the typical details are on timber framing. Fixing system can also be applied on steel framing.

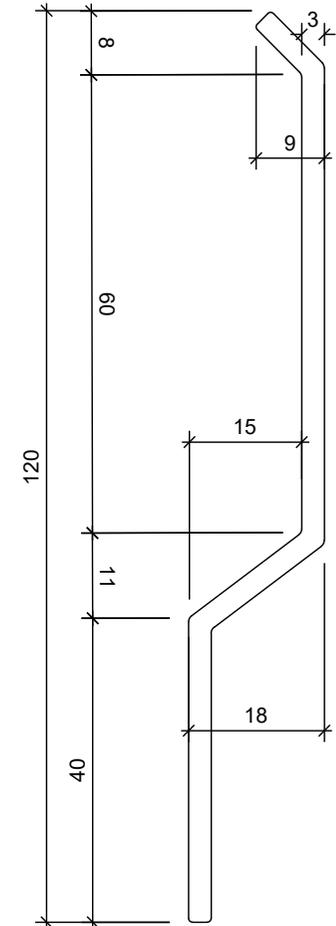



Indurabase Extrusion
Alloy & Temper: 6060-T6
Colour: Mill Finish

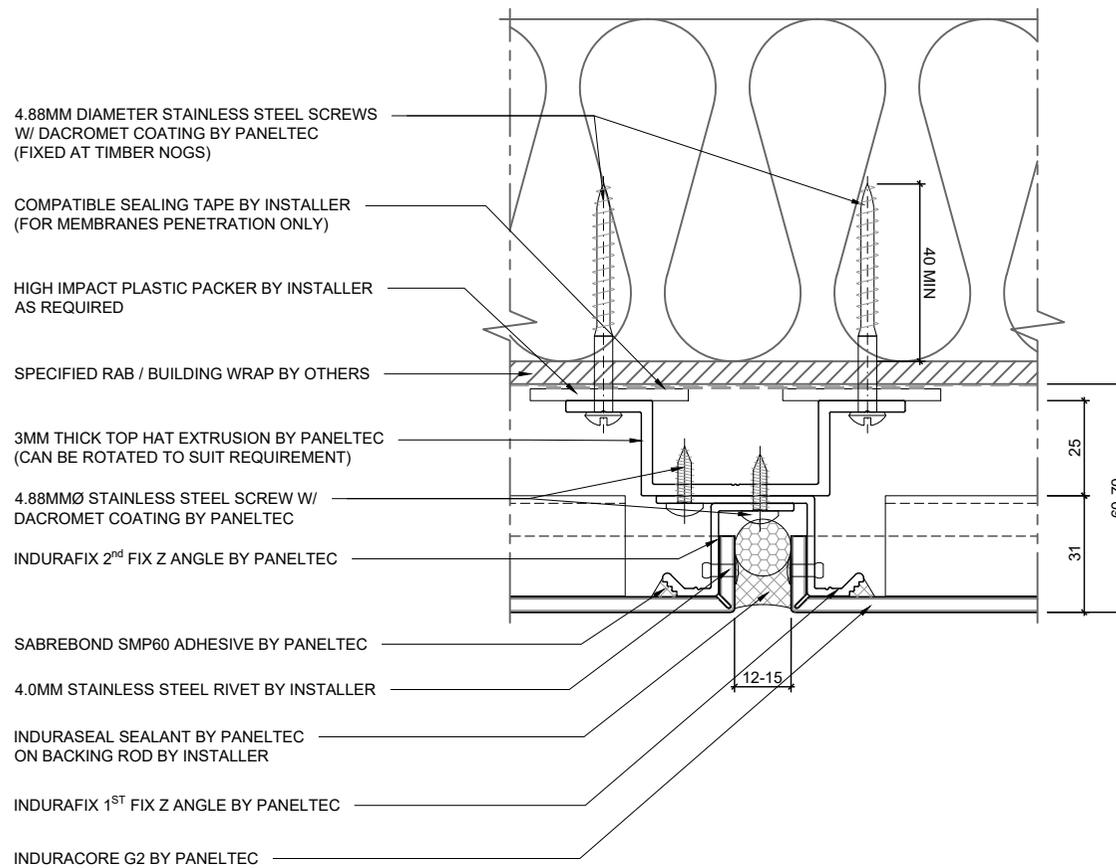


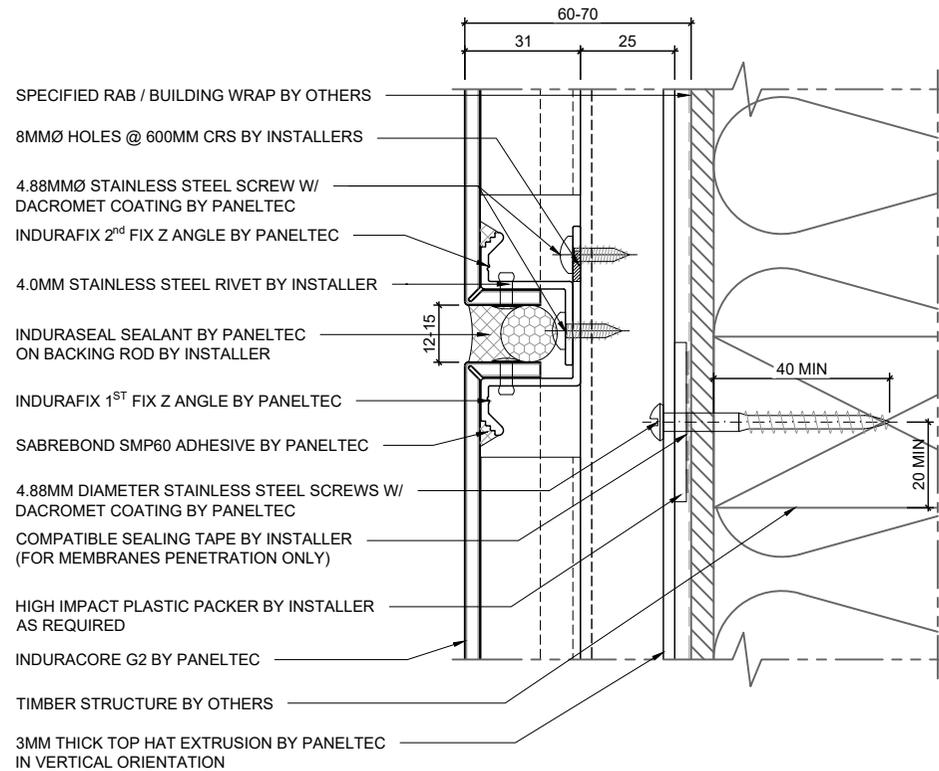


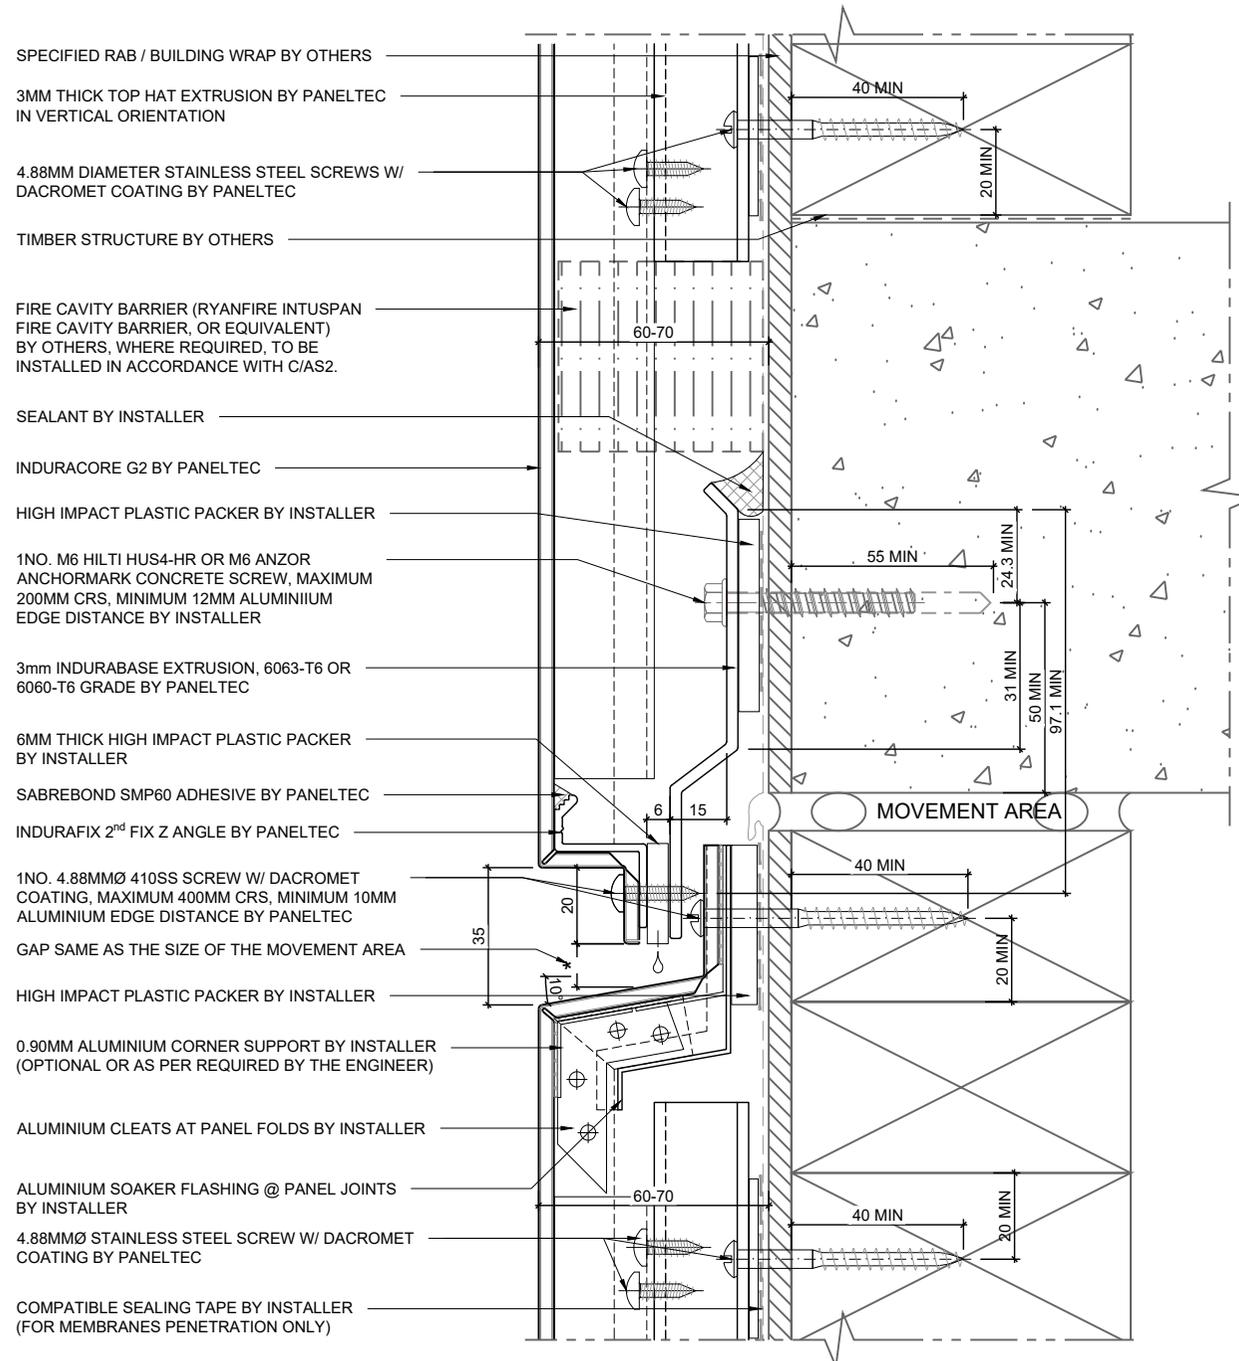


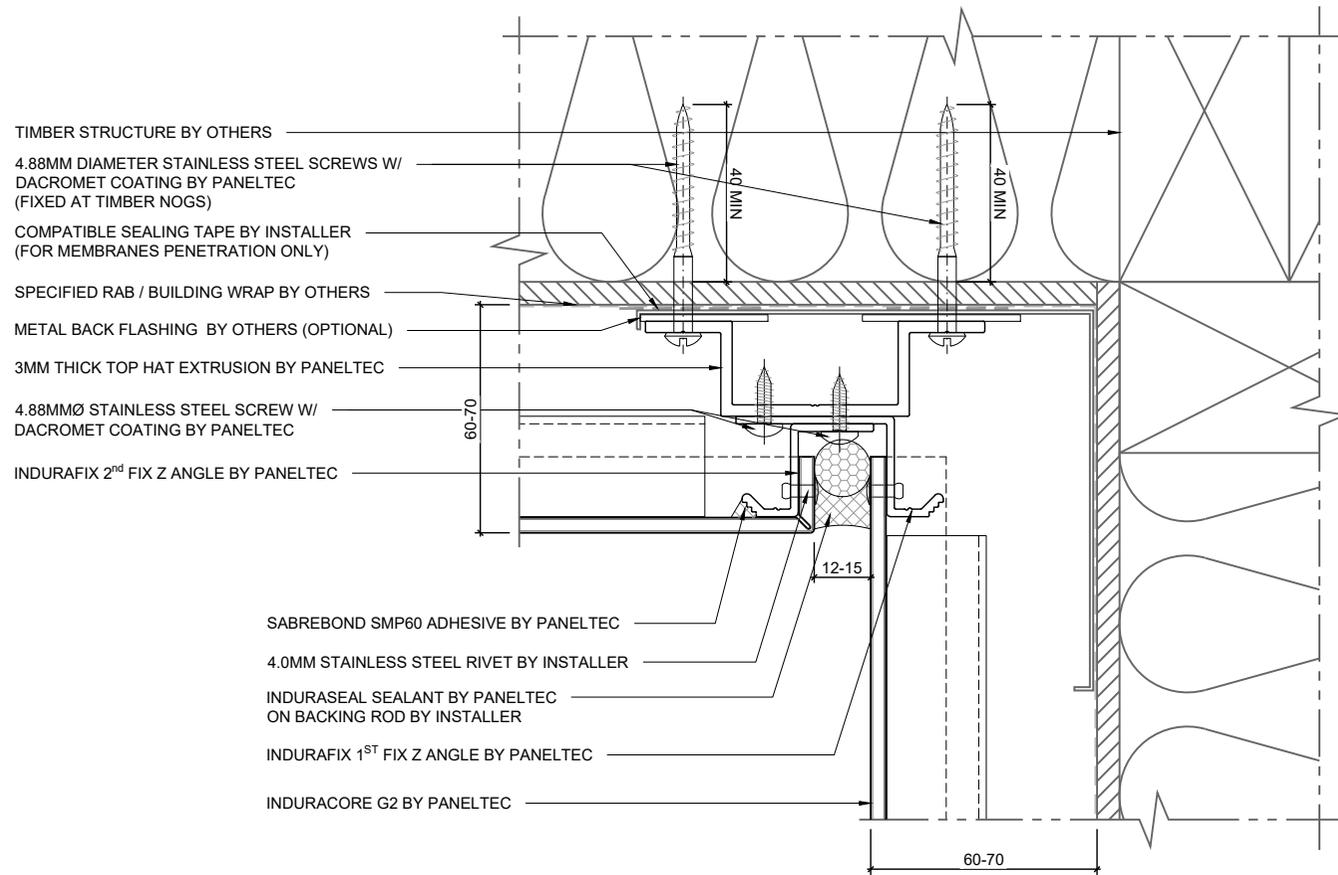


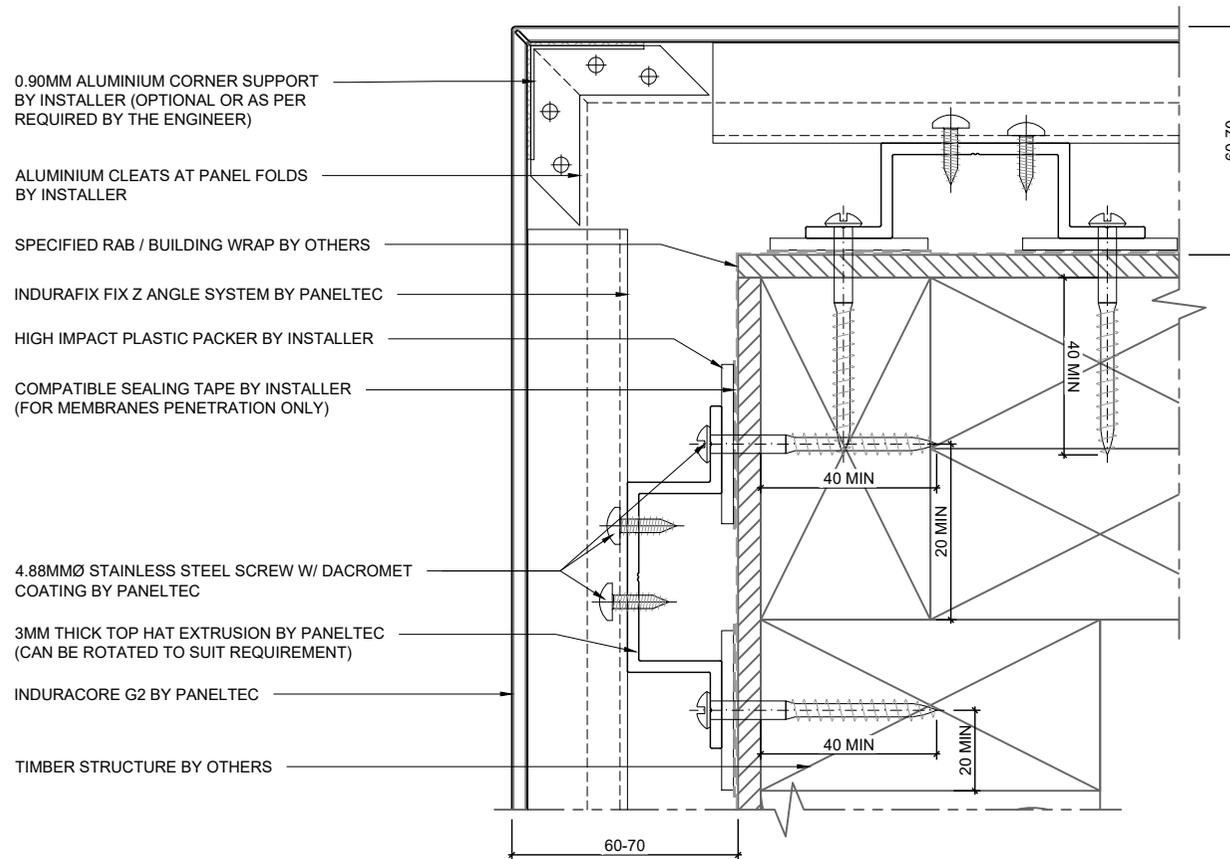


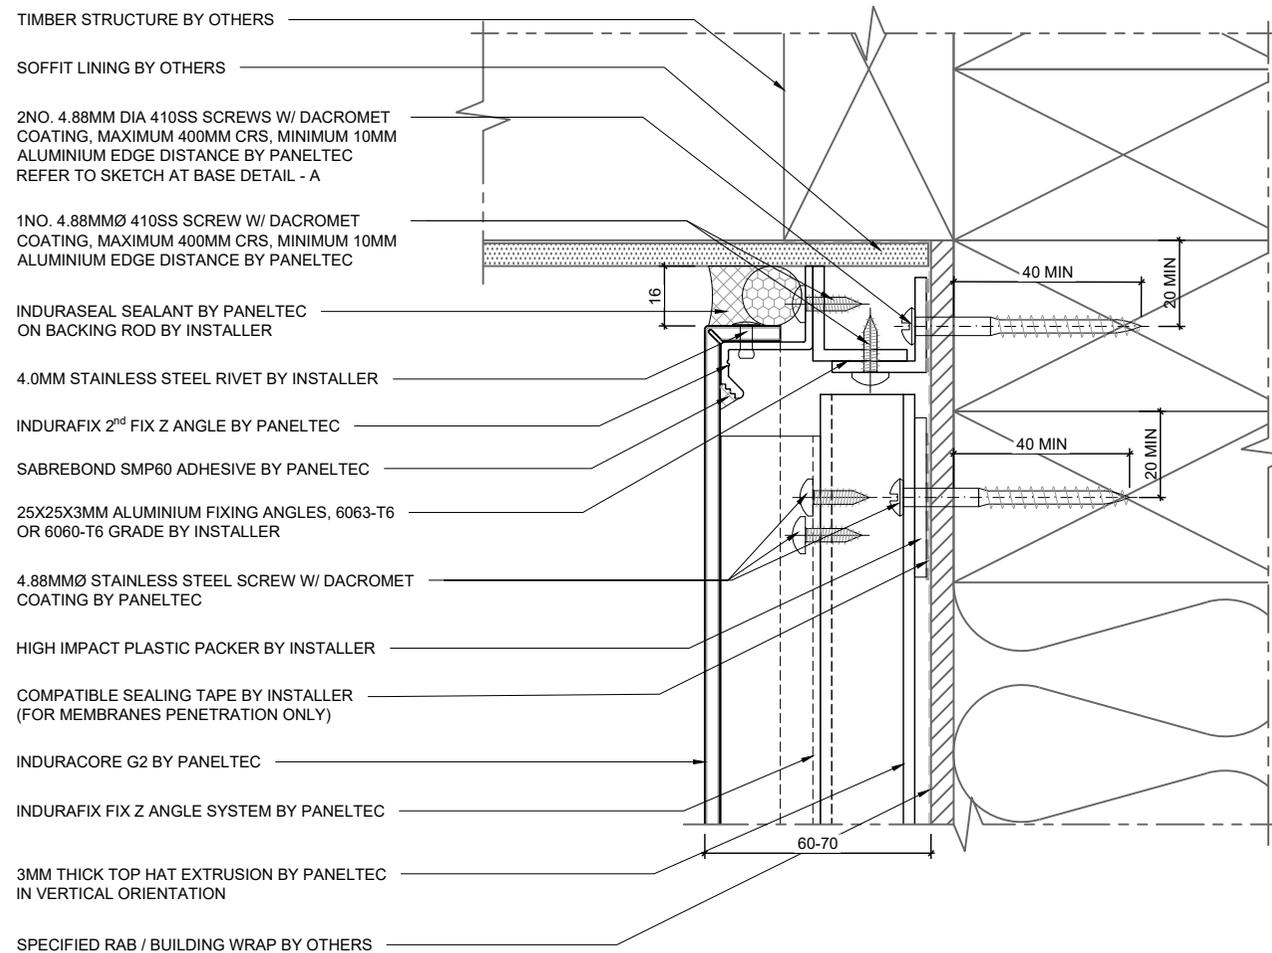


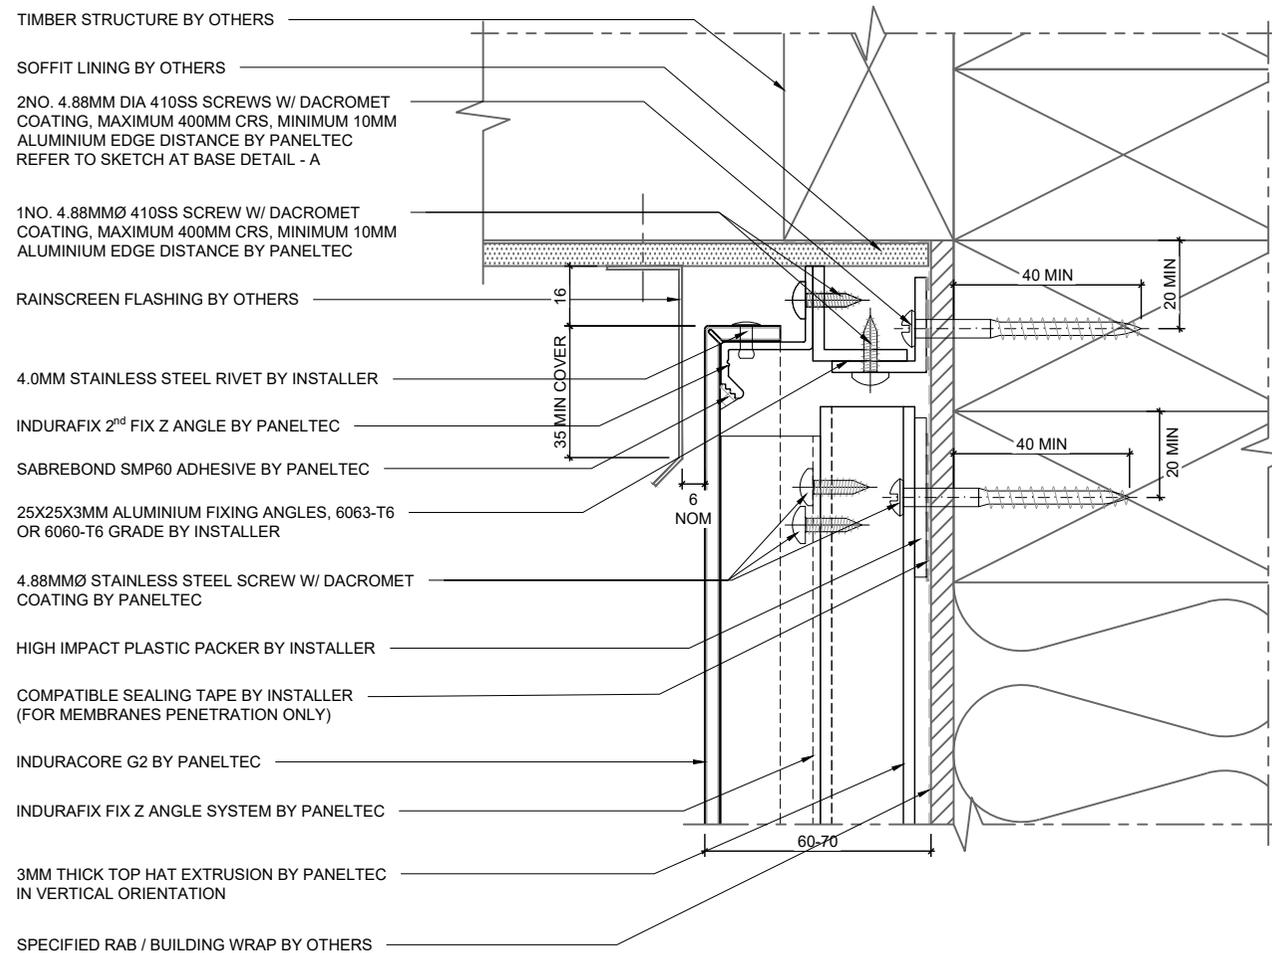


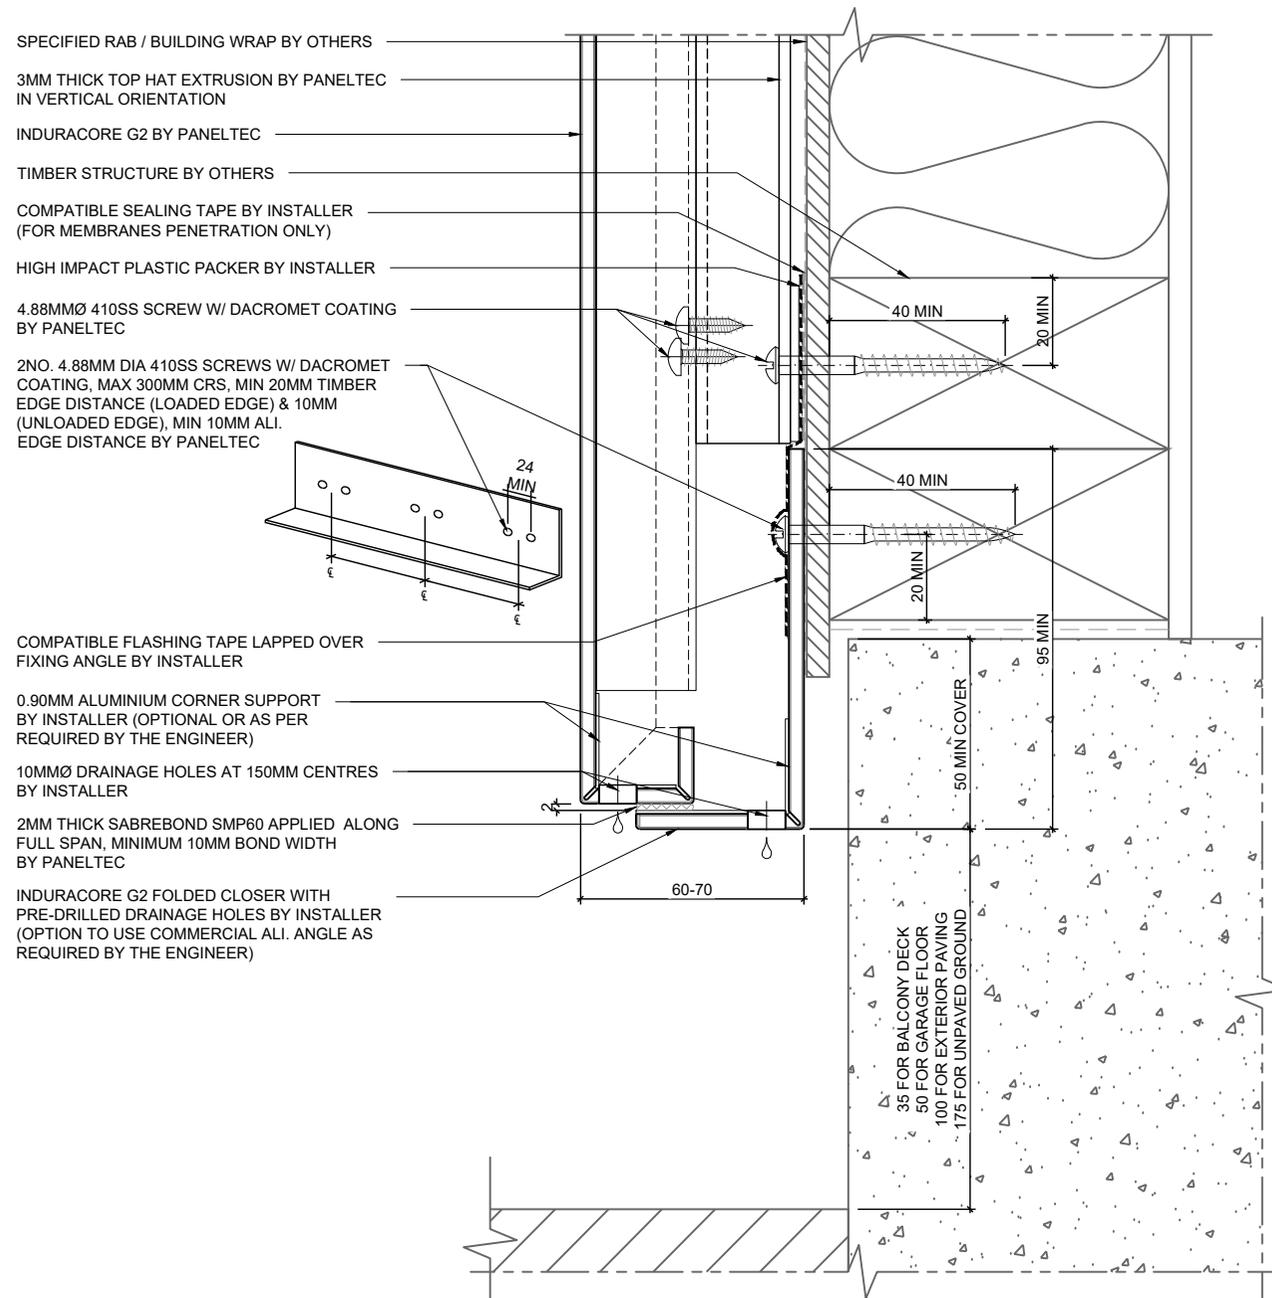


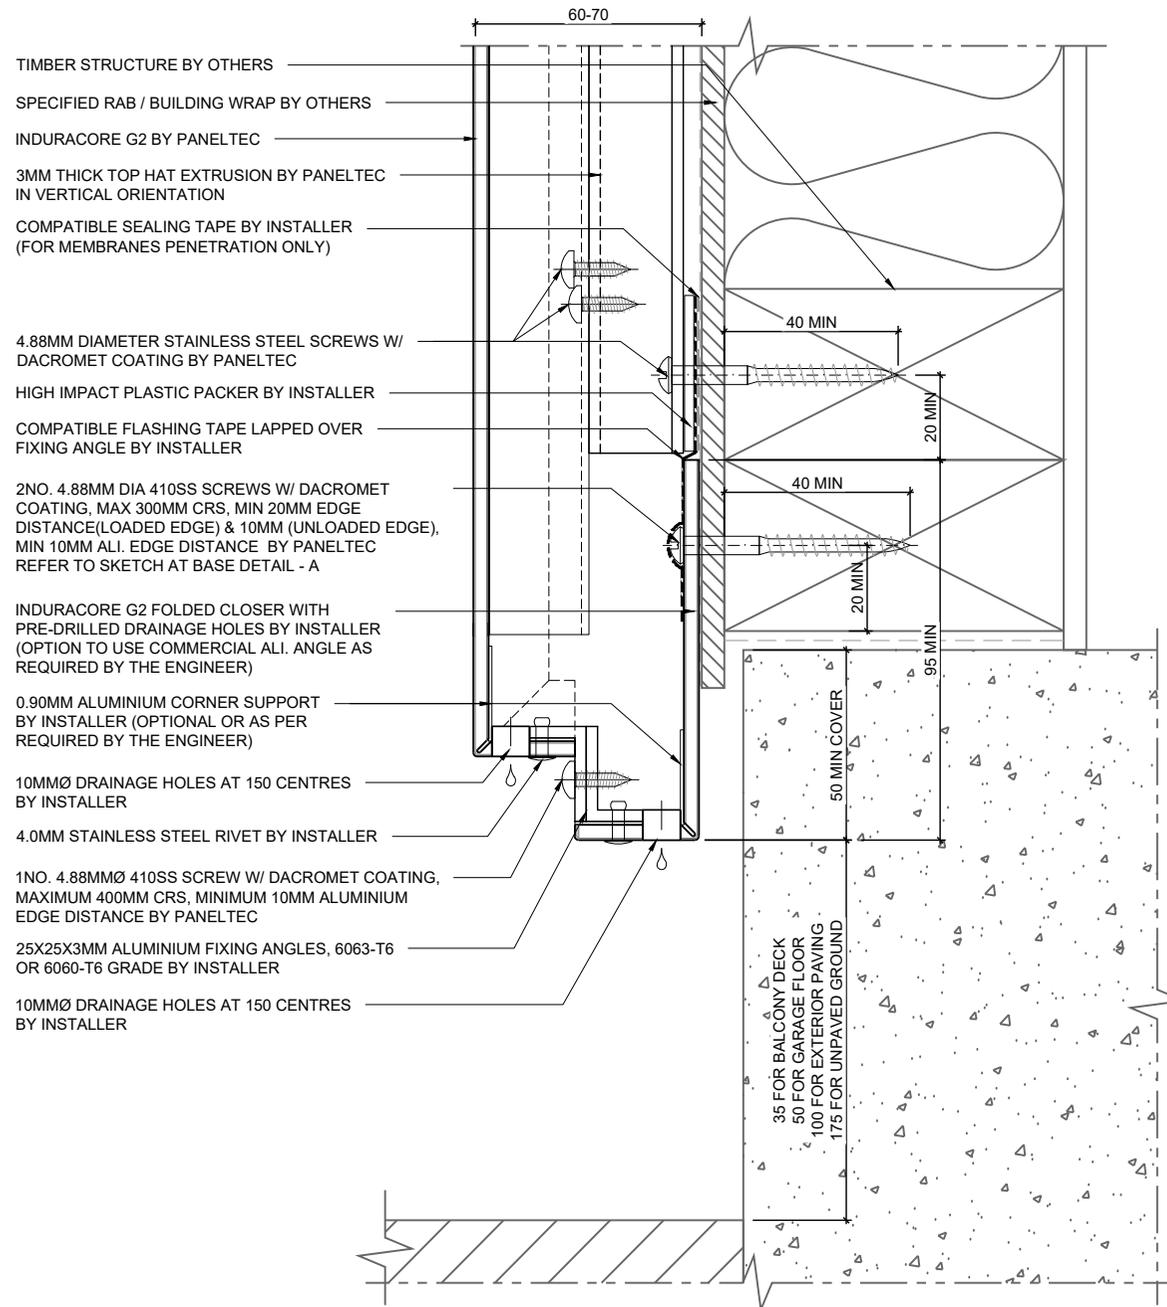


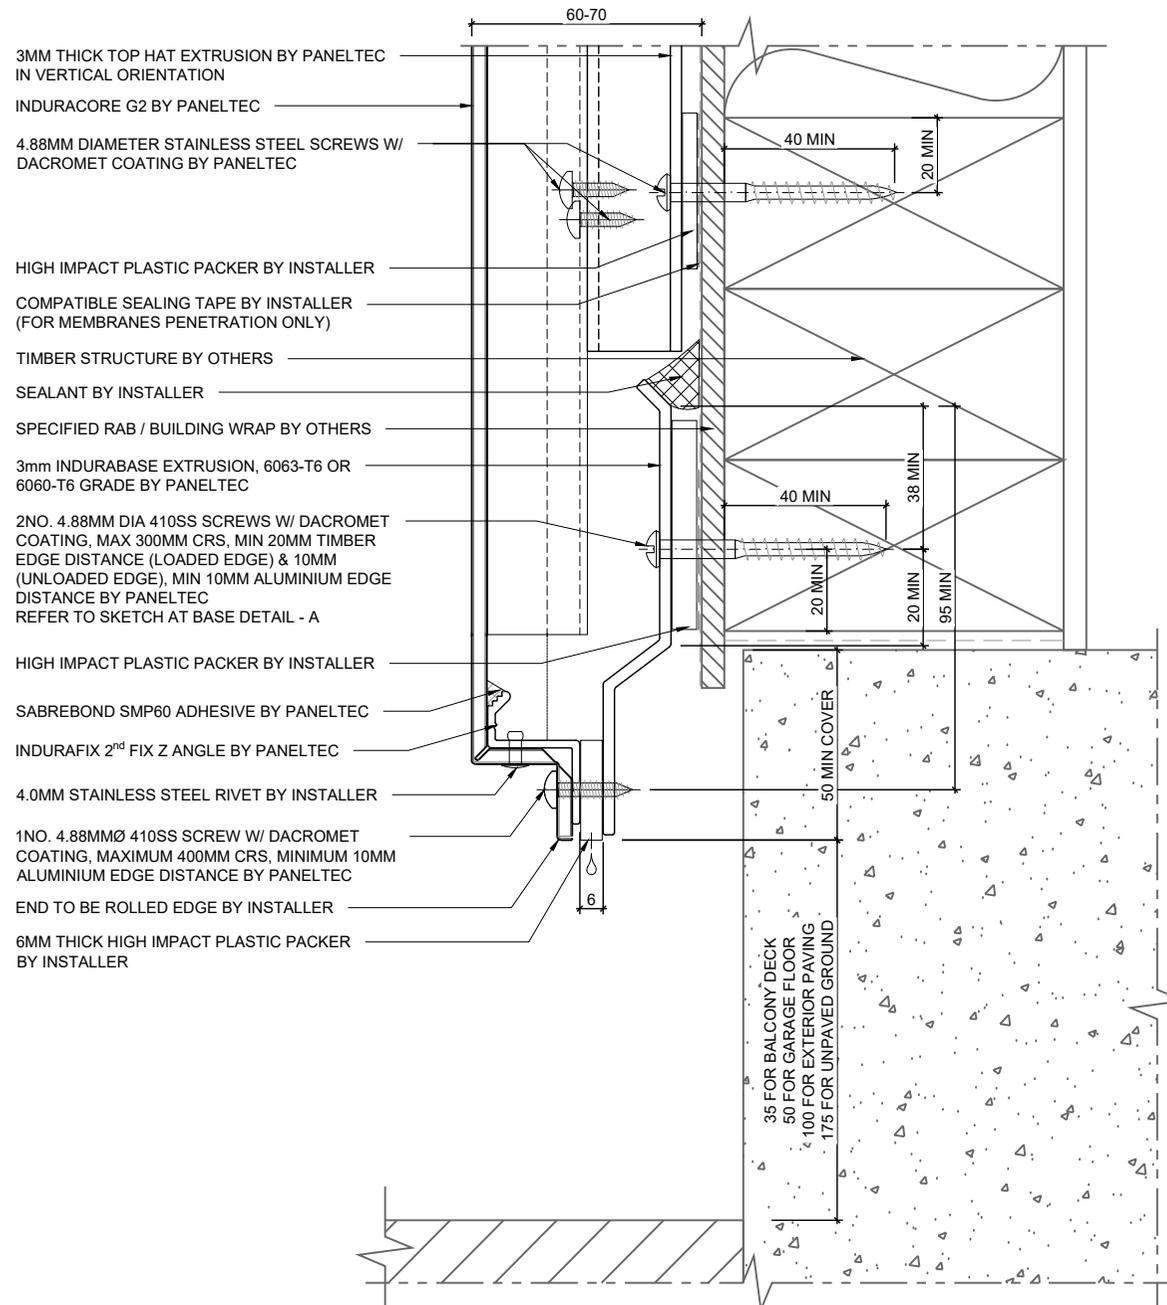


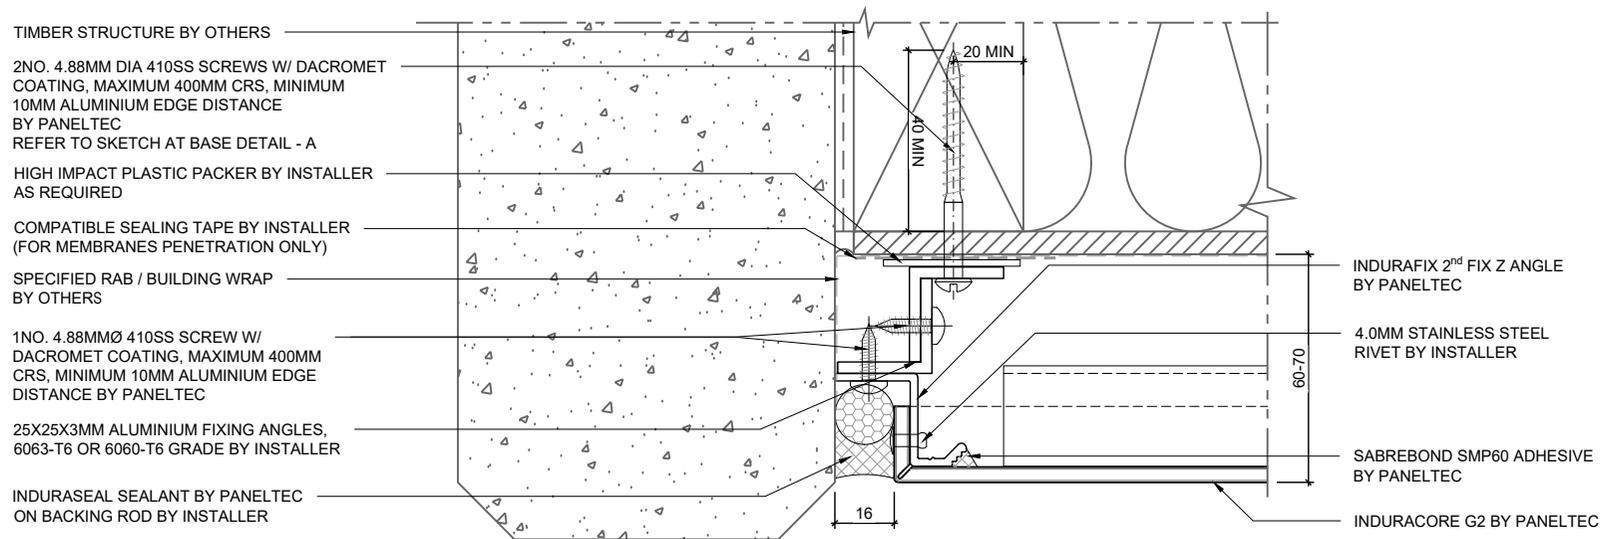


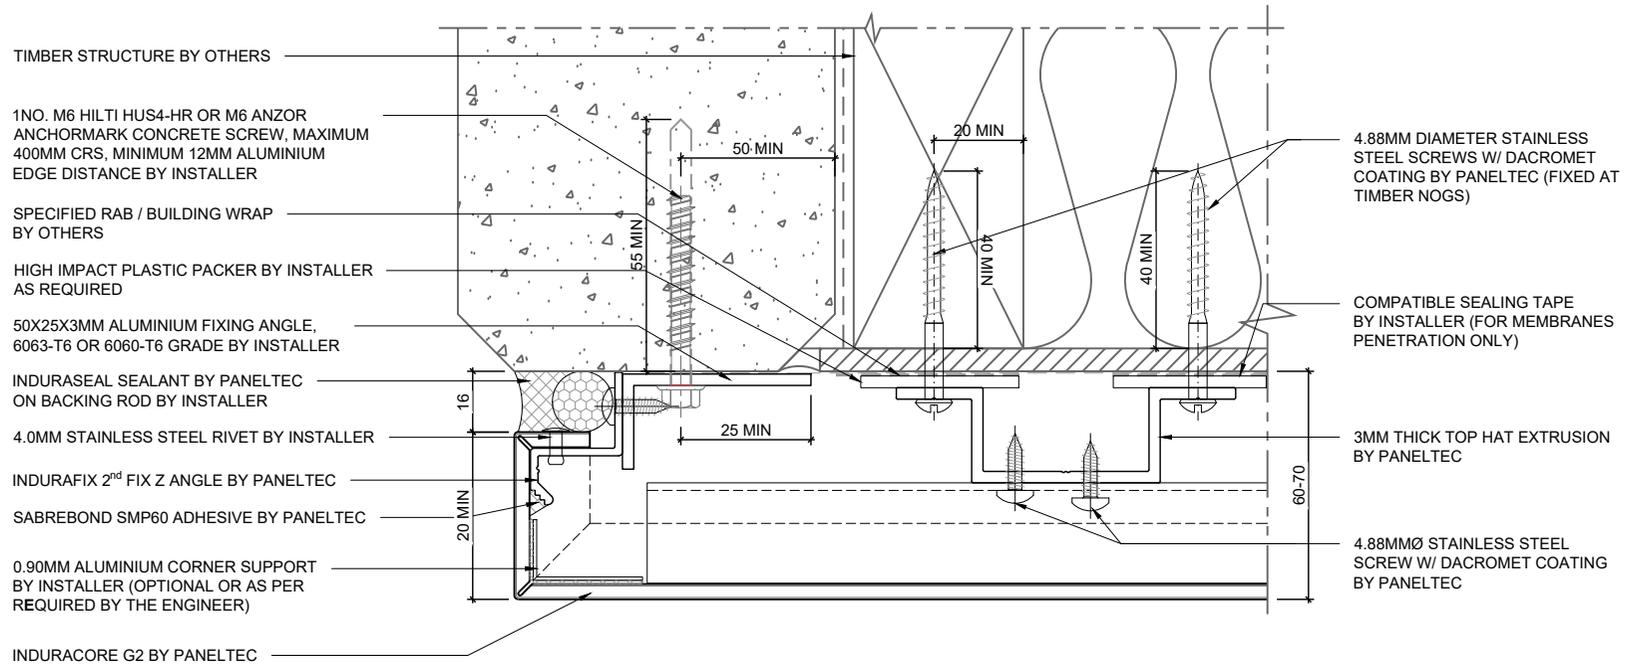


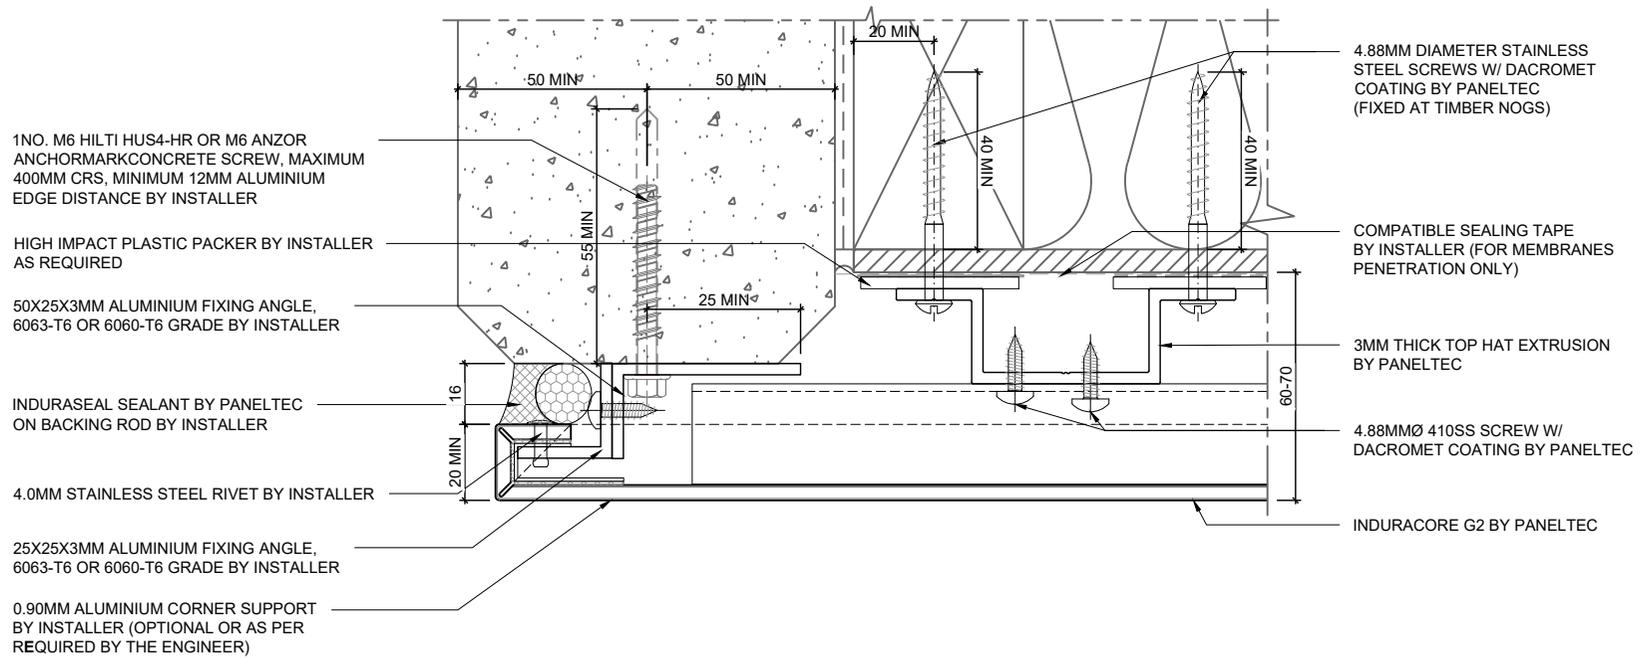


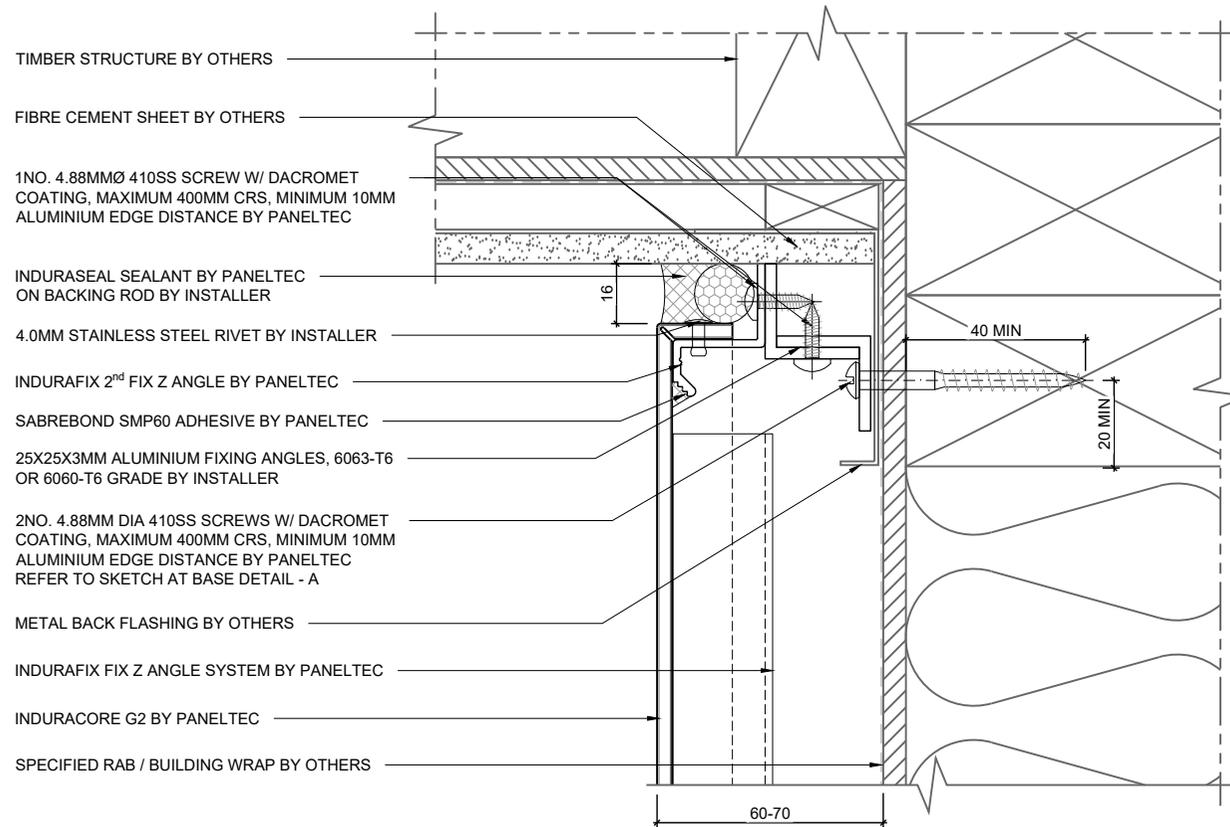


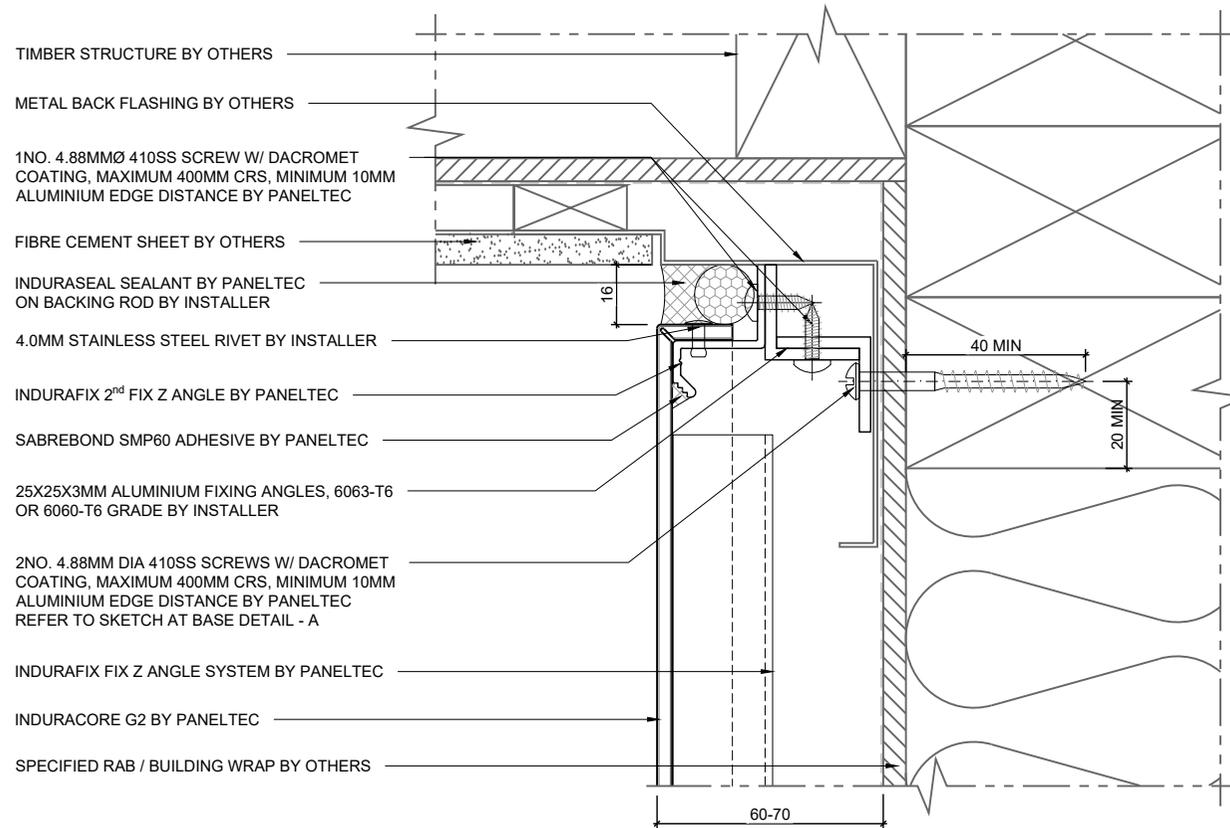


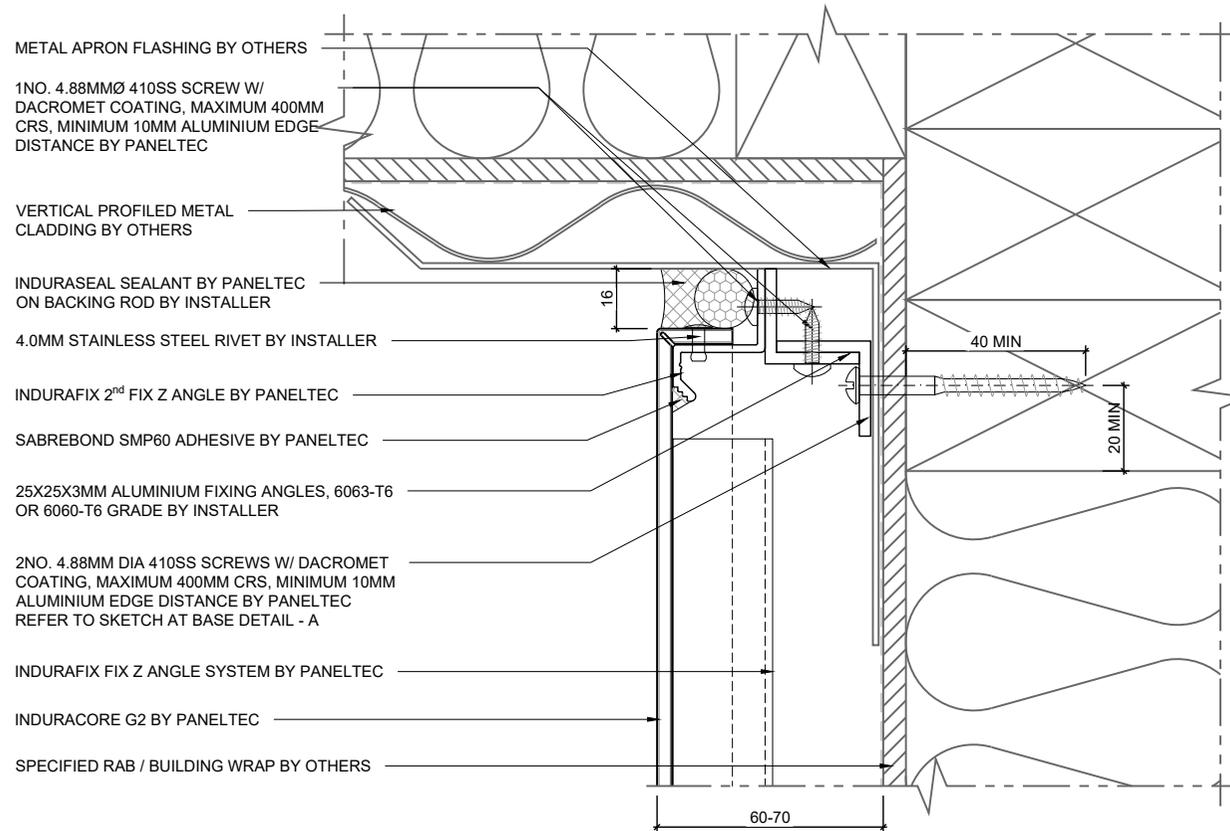


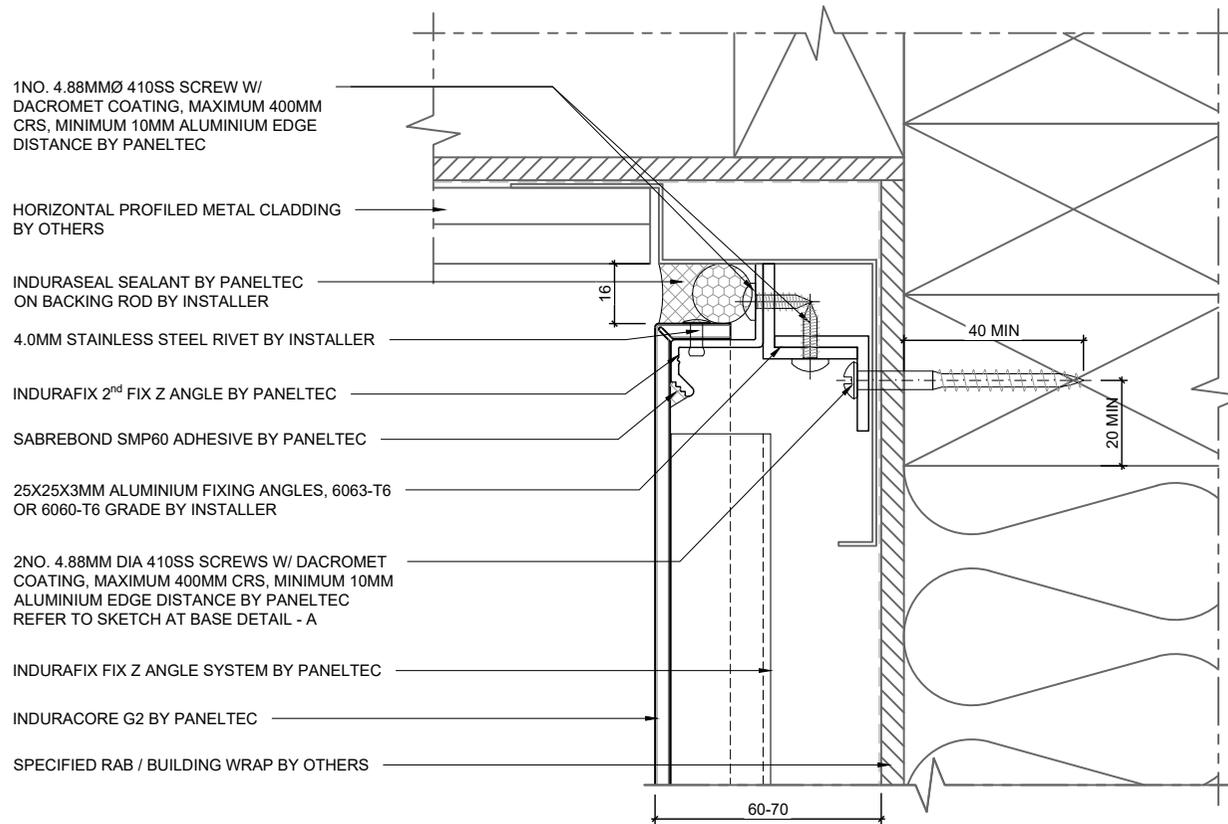

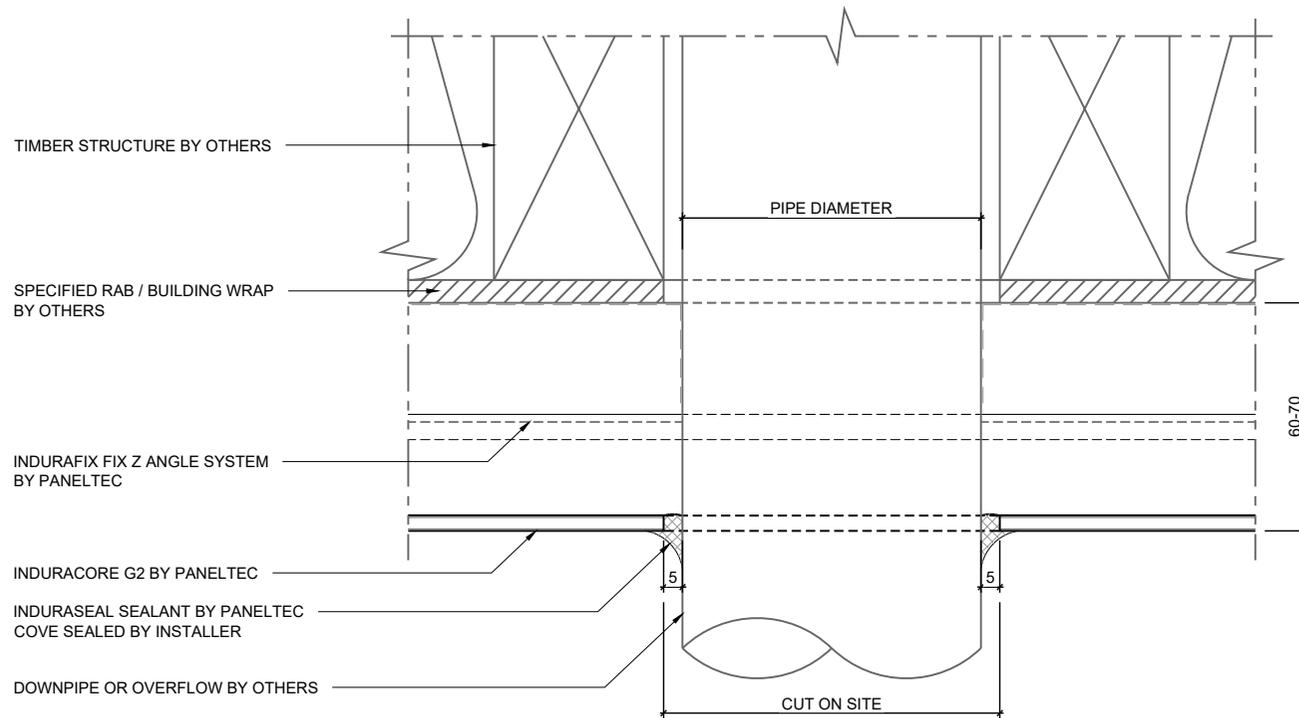

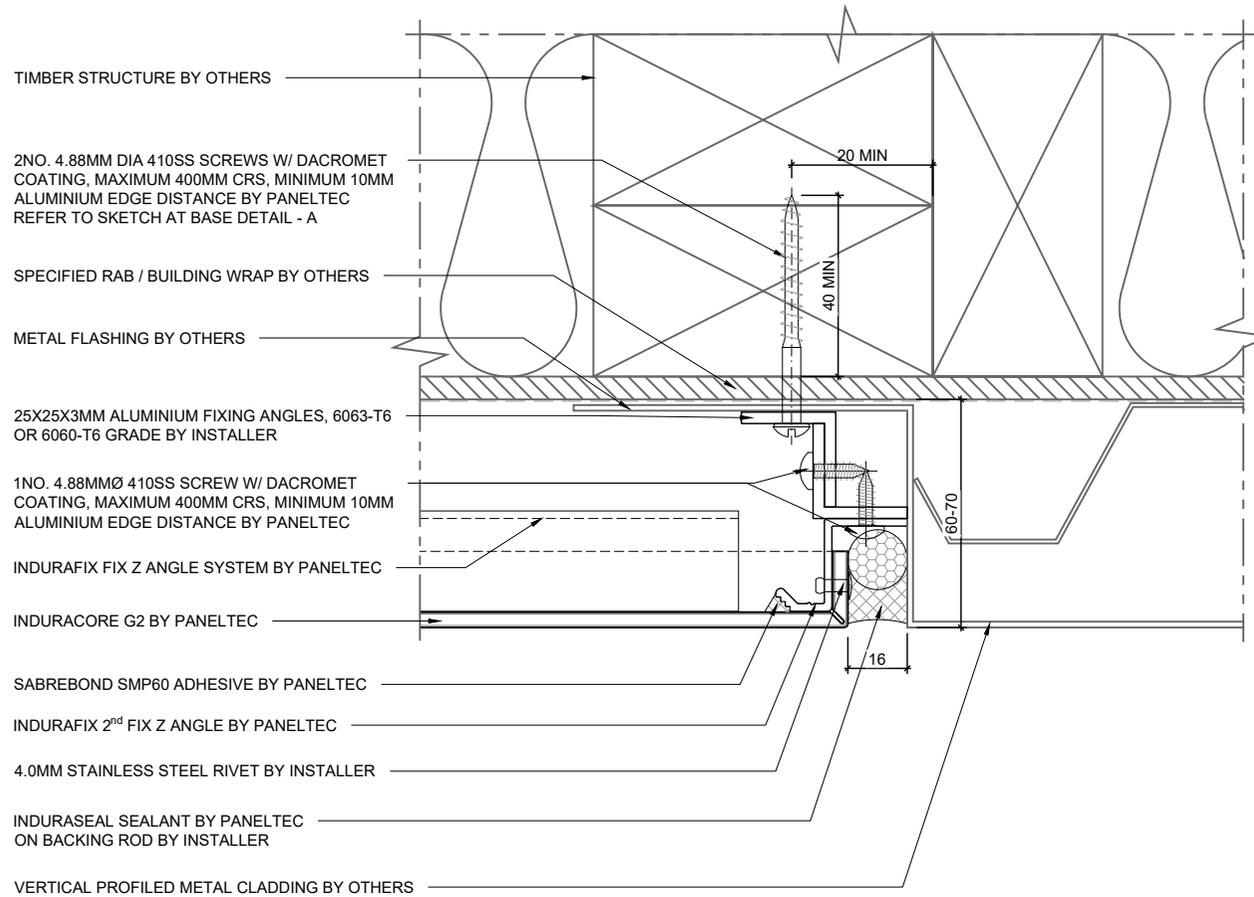


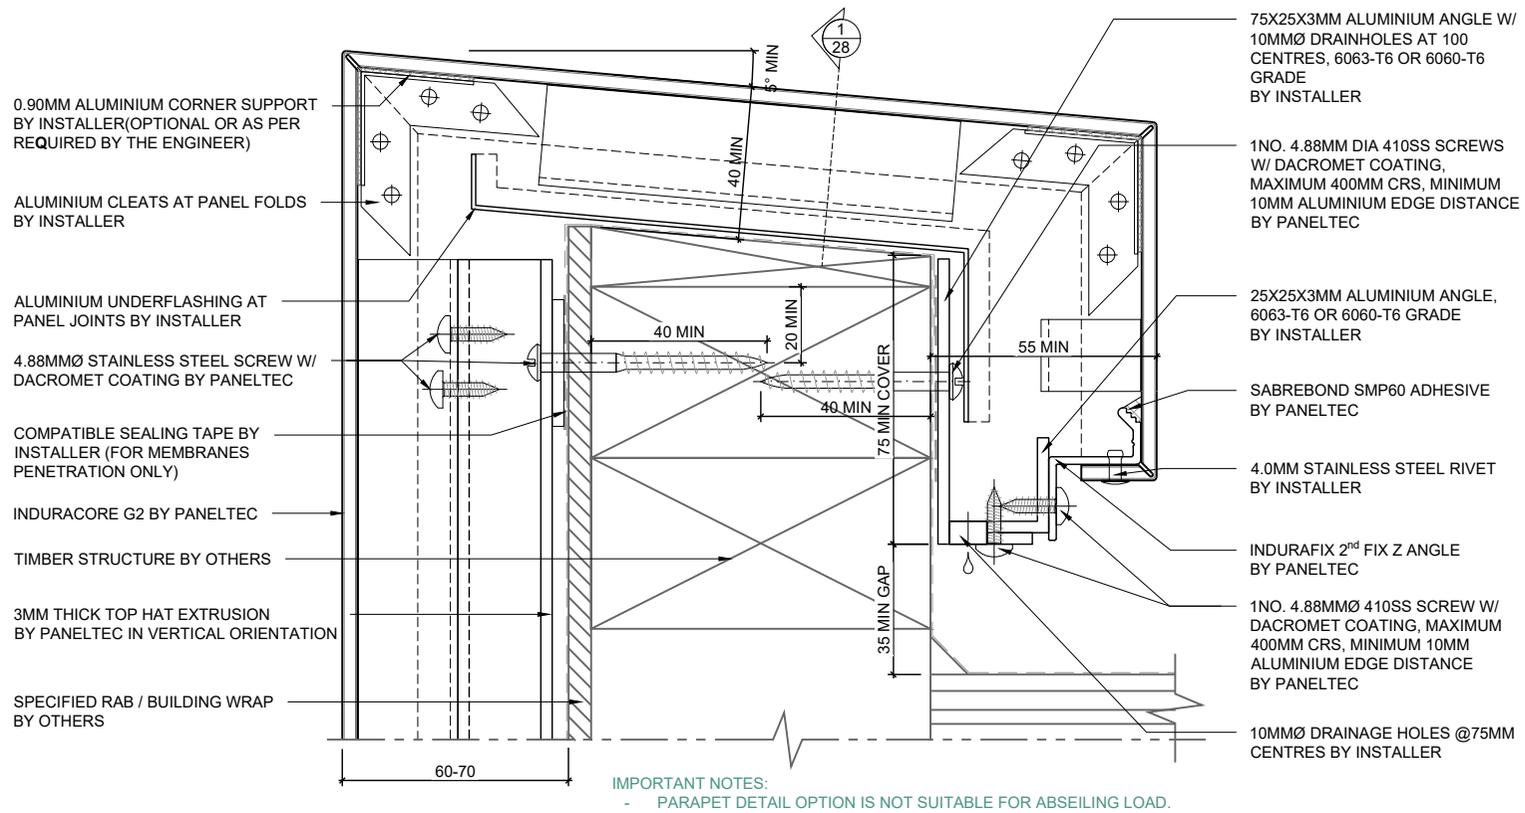


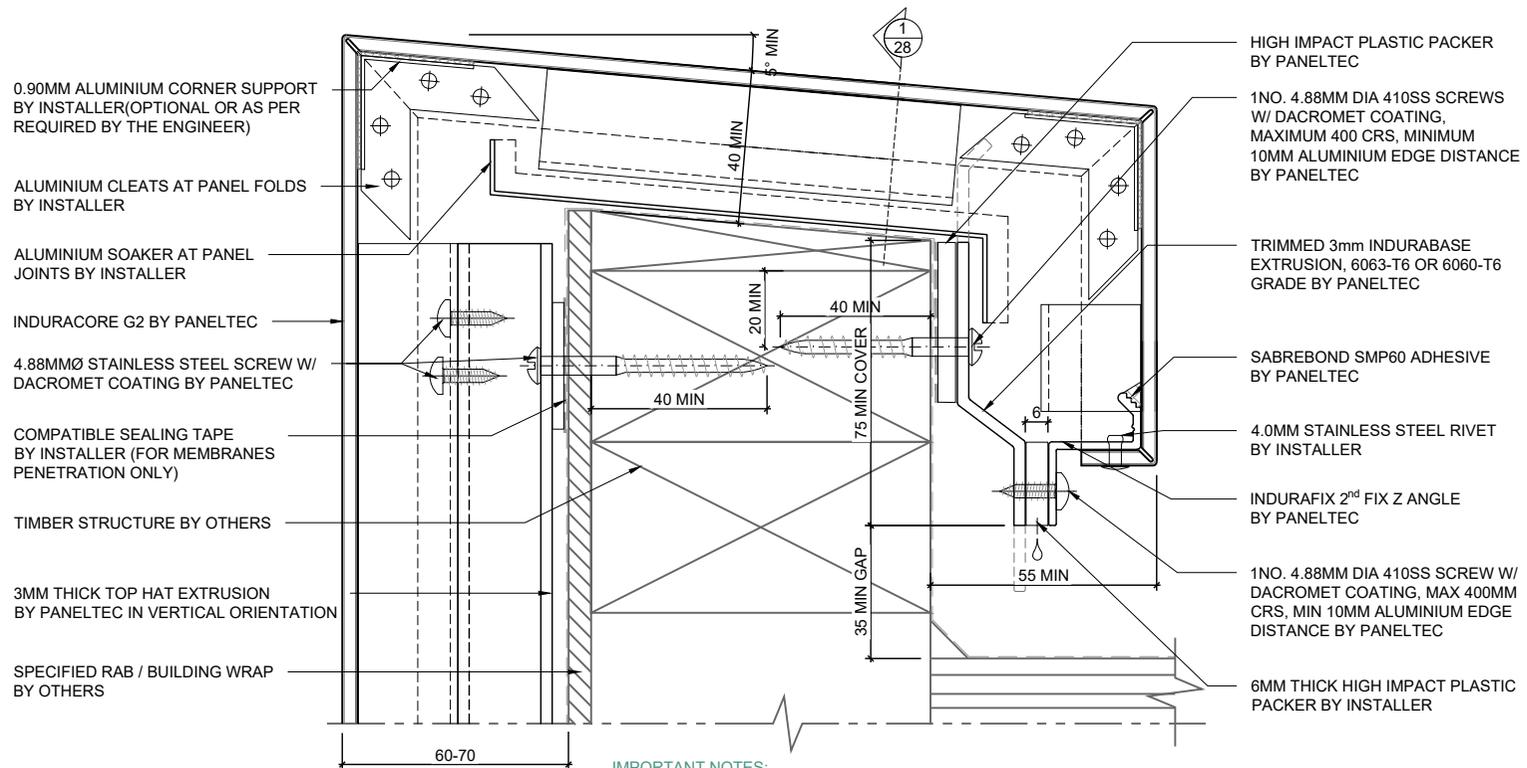

IMPORTANT NOTES:


- PARAPET DETAIL OPTION IS NOT SUITABLE FOR ABSEILING
- PARAPET DETAIL OPTION IS APPLICABLE ONLY WHERE THERE IS NO LIVE LOAD.

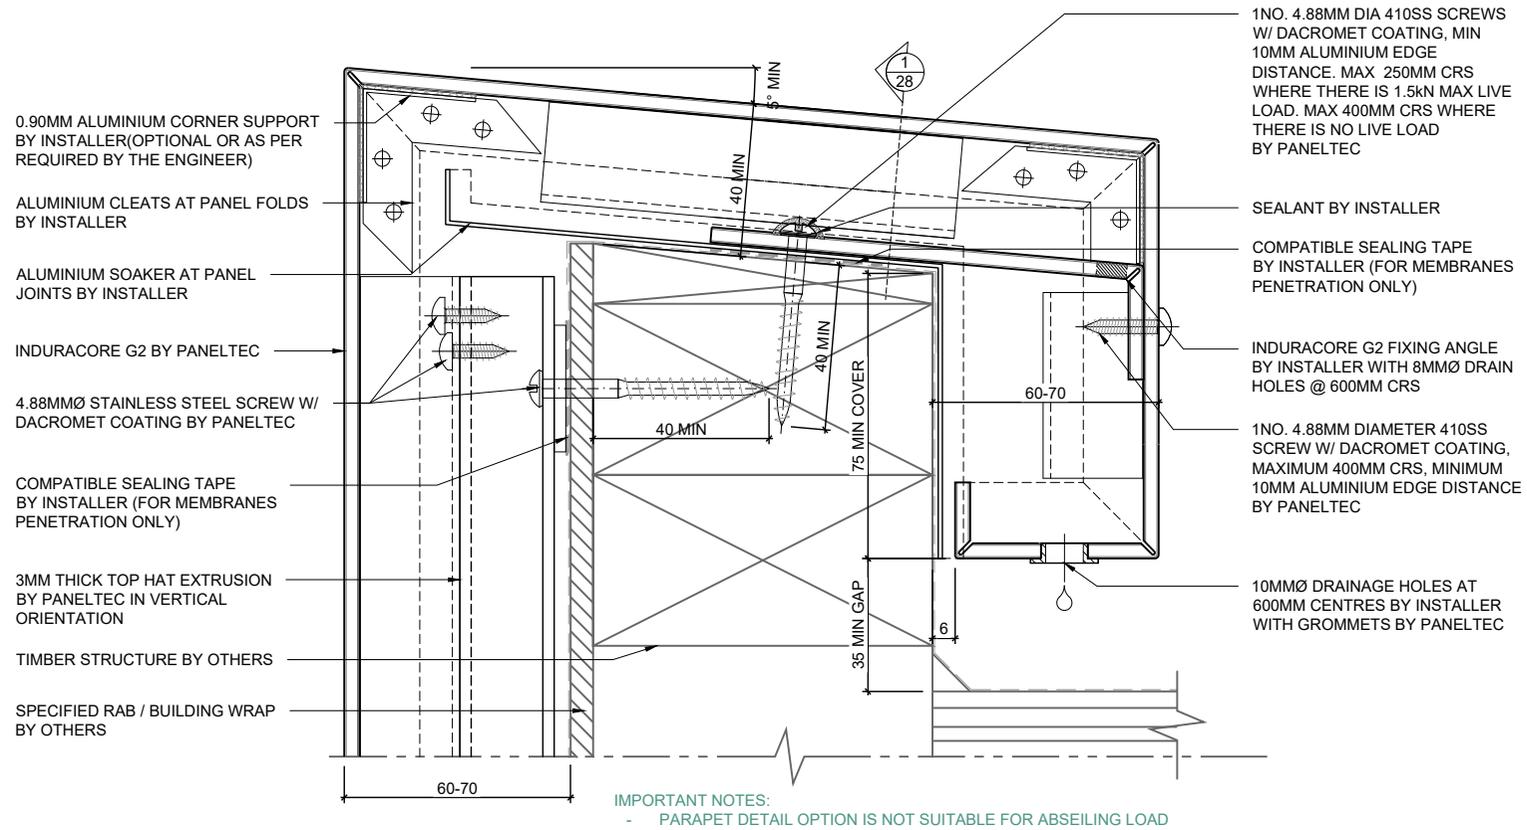


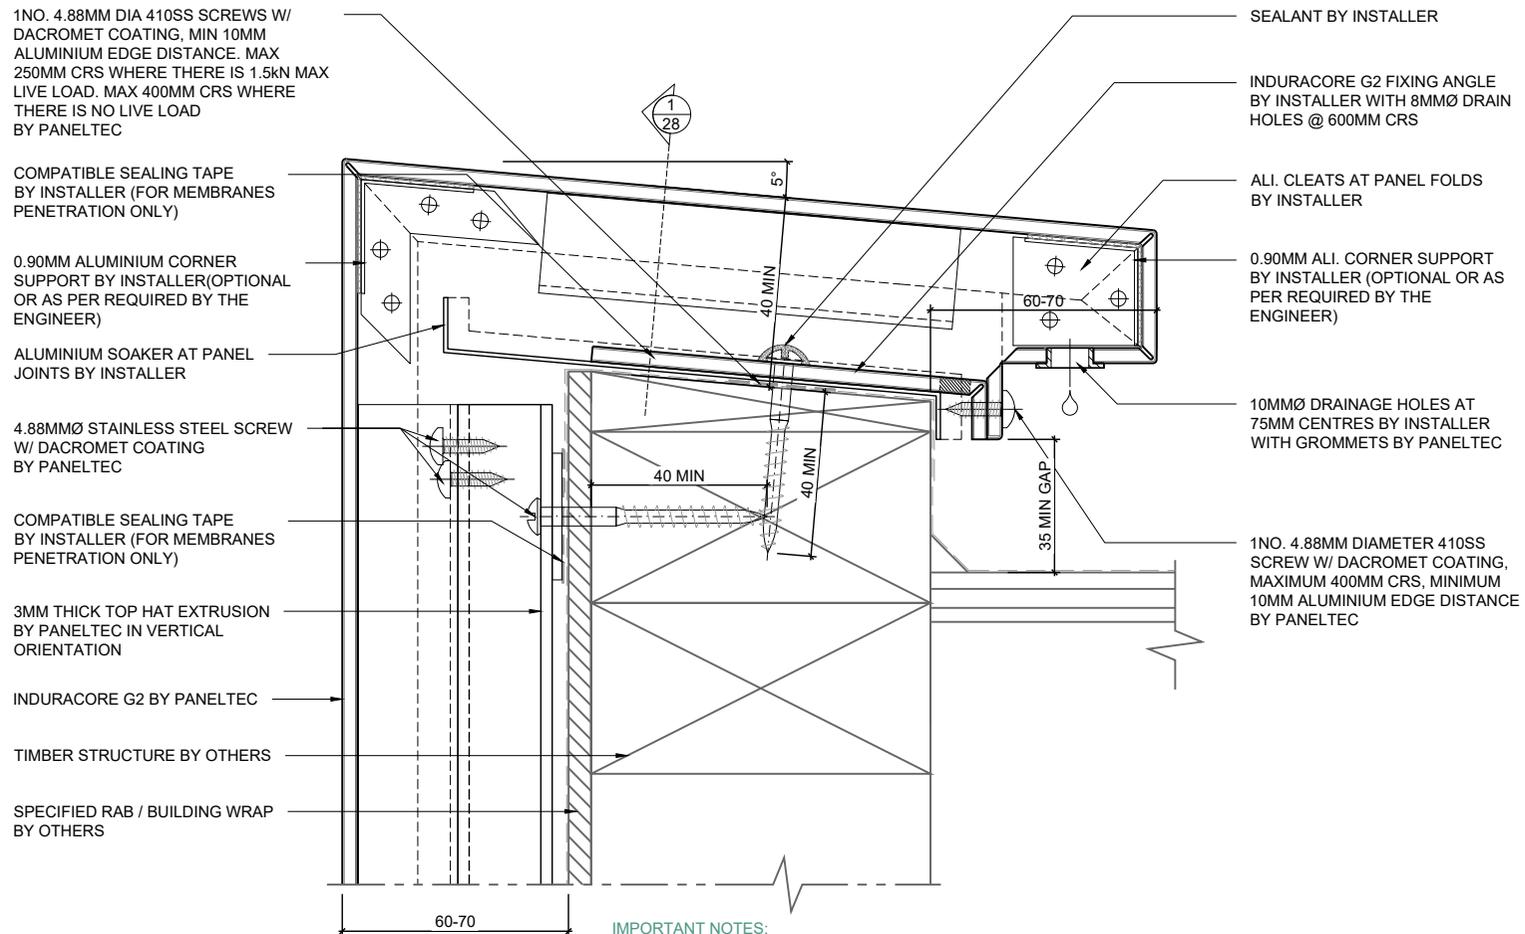

IMPORTANT NOTES:


- A. PARAPET DETAIL OPTION IS NOT SUITABLE FOR ABSEILING LOAD.
- B. FOR LOW ROOF UPSTAND ONLY.
- C. THIS DETAIL DOES NOT COMPLY WITH THE BUILDING CODE REQUIREMENTS BUT MAY BE CONSIDERED AN ACCEPTABLE ALTERNATIVE SOLUTION.
- D. IT IS THE RESPONSIBILITY OF THE BUILDER OR ARCHITECT TO ENSURE THAT THIS DETAIL IS SATISFACTORY. SPECIFIC INSTRUCTIONS ARE REQUIRED FOR ITS IMPLEMENTATION.

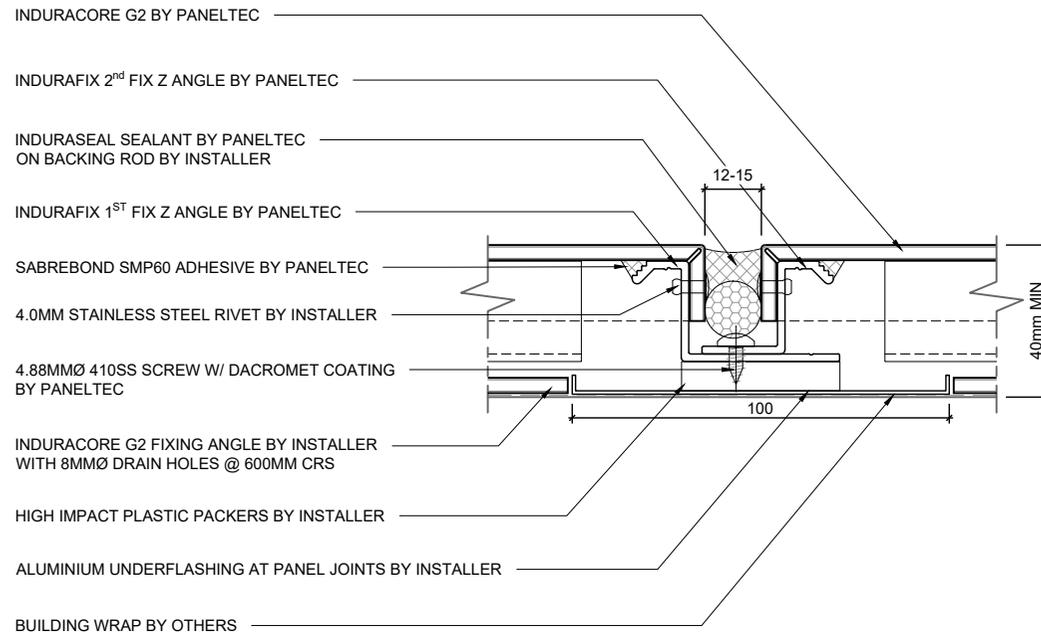

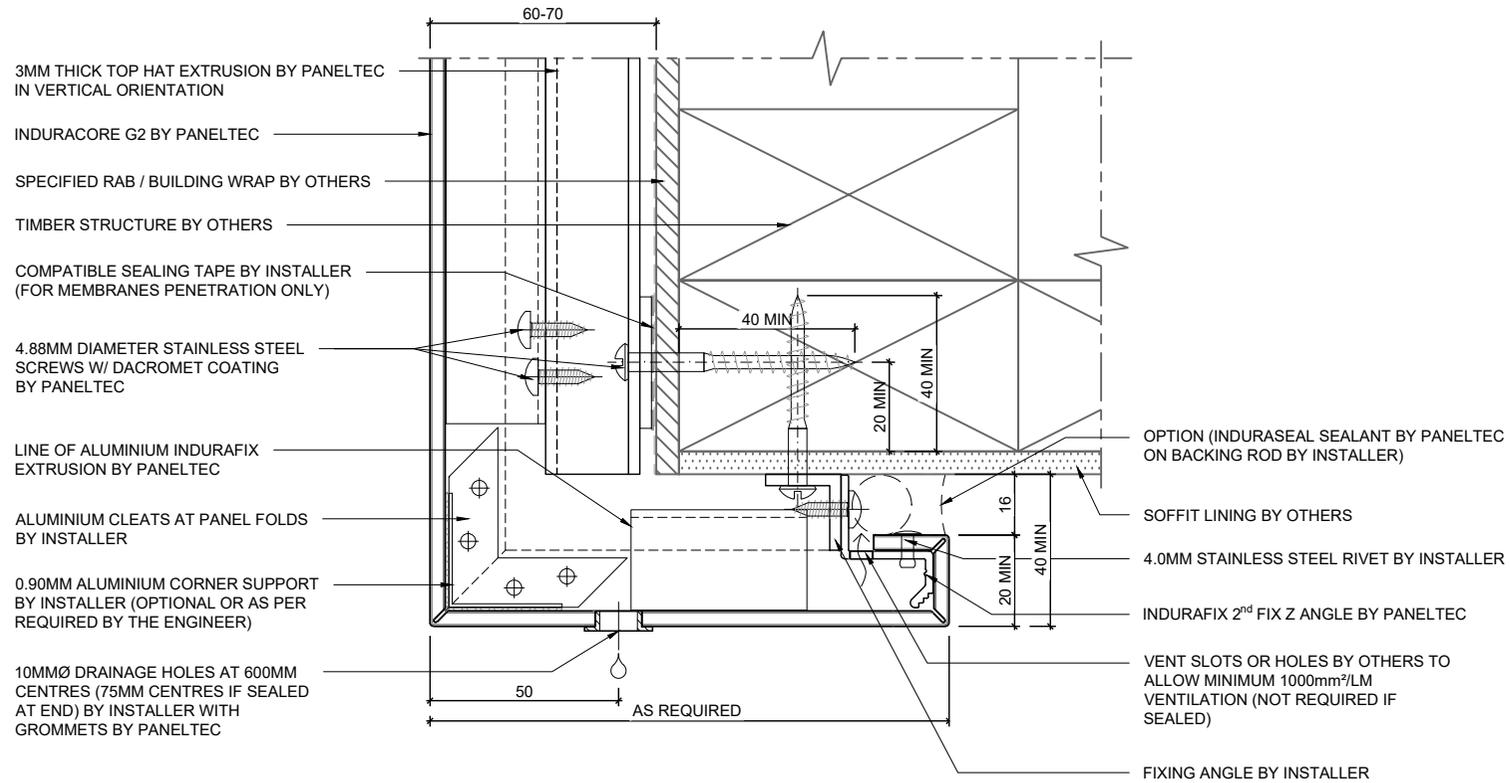


IMPORTANT NOTES:

- RECOMMENDED TO HAVE THE PANEL BOTTOM SLOPING @1.5° TOWARDS THE SIDE WHERE THE DRAIN HOLE IS LOCATED TO AVOID RISK OF PONDING.

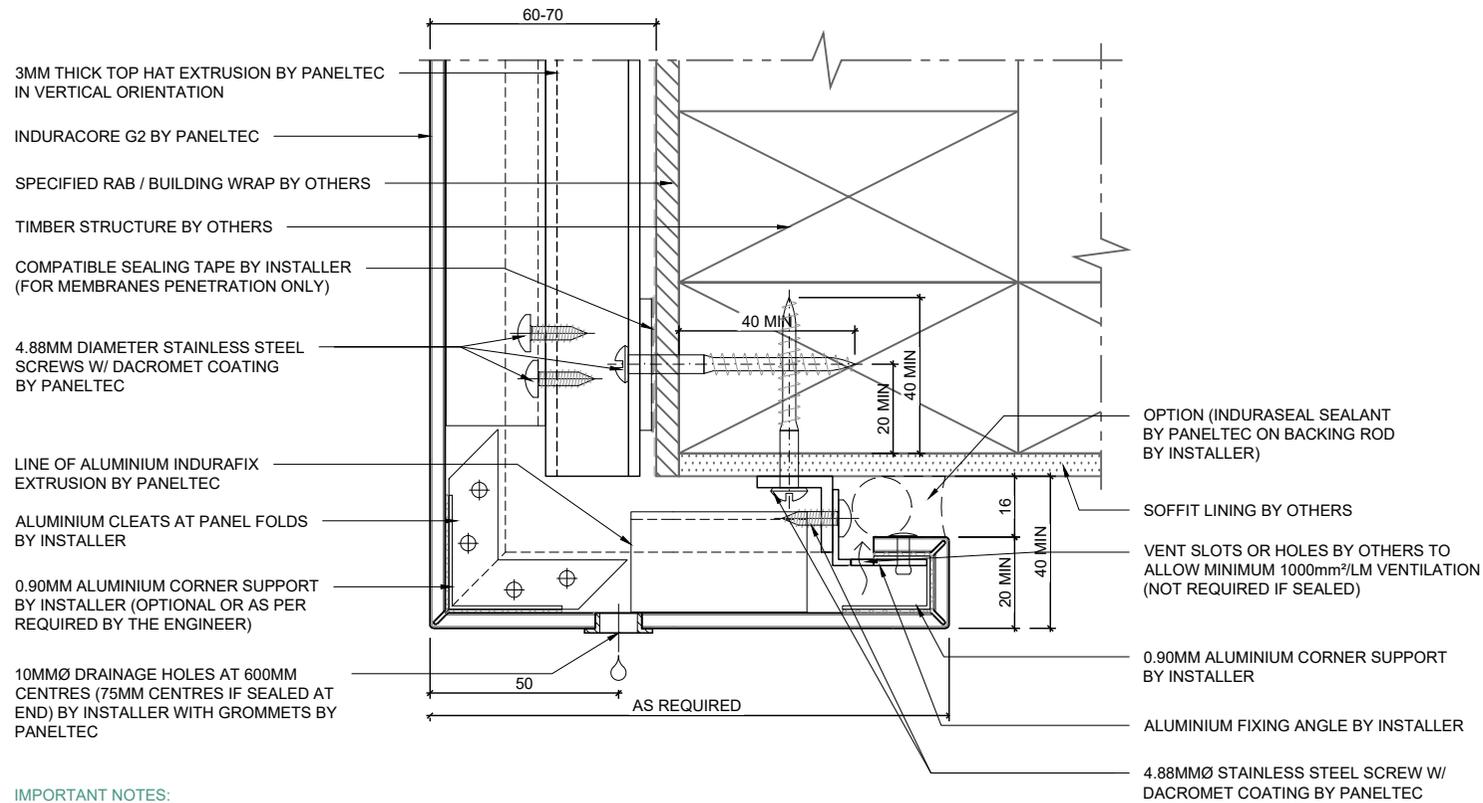


IMPORTANT NOTES:

- RECOMMENDED TO HAVE THE PANEL BOTTOM SLOPING @1.5° TOWARDS THE SIDE WHERE THE DRAIN HOLE IS LOCATED TO AVOID RISK OF PONDING.

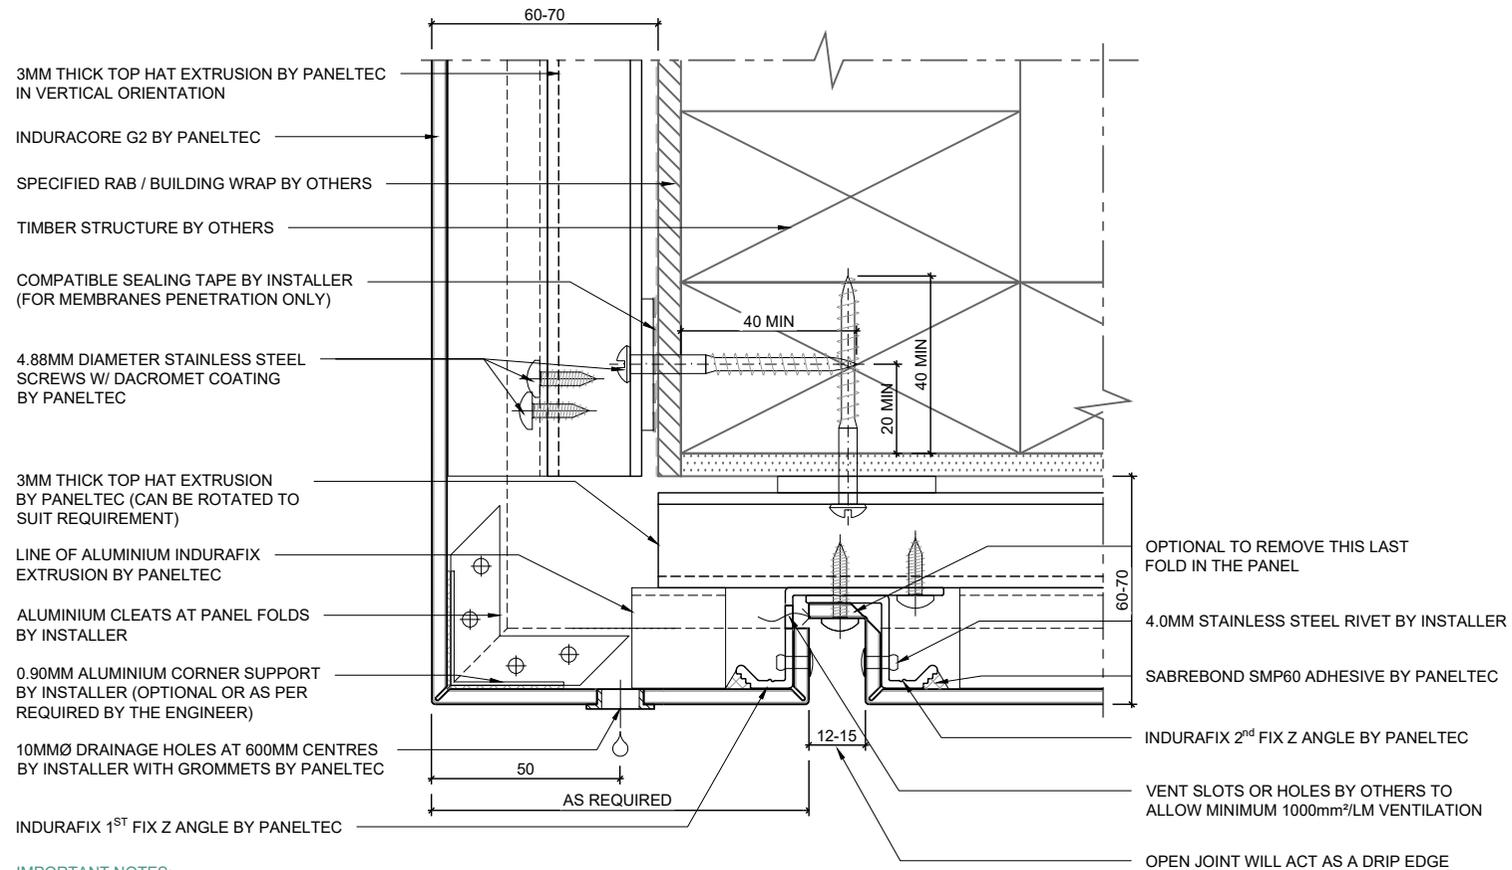


IMPORTANT NOTES:

- RECOMMENDED TO HAVE THE PANEL BOTTOM SLOPING @1.5° TOWARDS THE SIDE WHERE THE DRAIN HOLE IS LOCATED TO AVOID RISK OF PONDING.

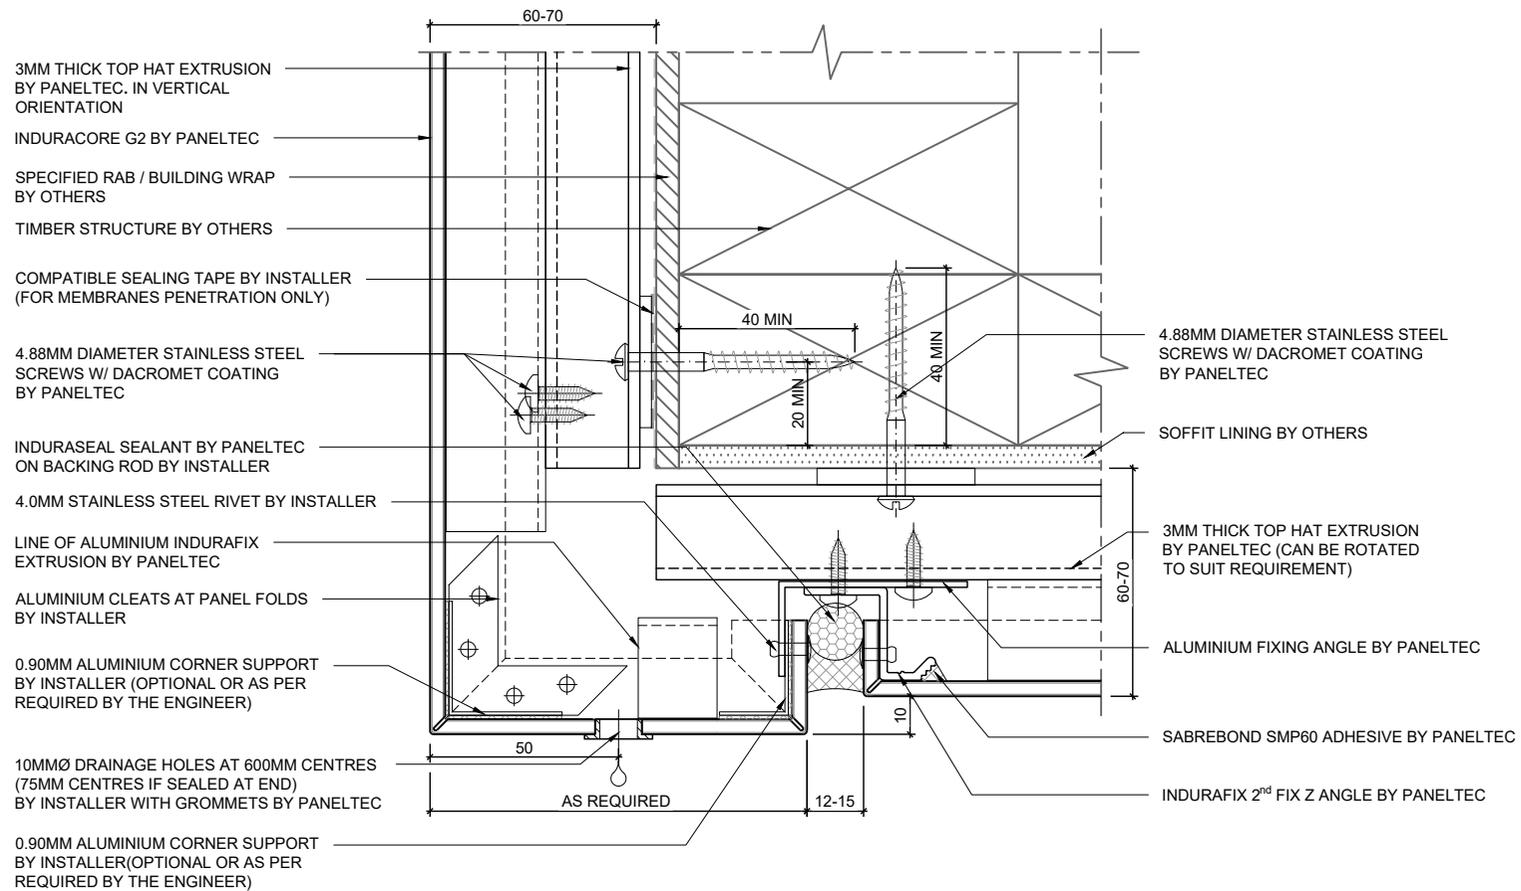


IMPORTANT NOTES:

- RECOMMENDED TO HAVE THE PANEL BOTTOM SLOPING @1.5° TOWARDS THE SIDE WHERE THE DRAIN HOLE IS LOCATED TO AVOID RISK OF PONDING.

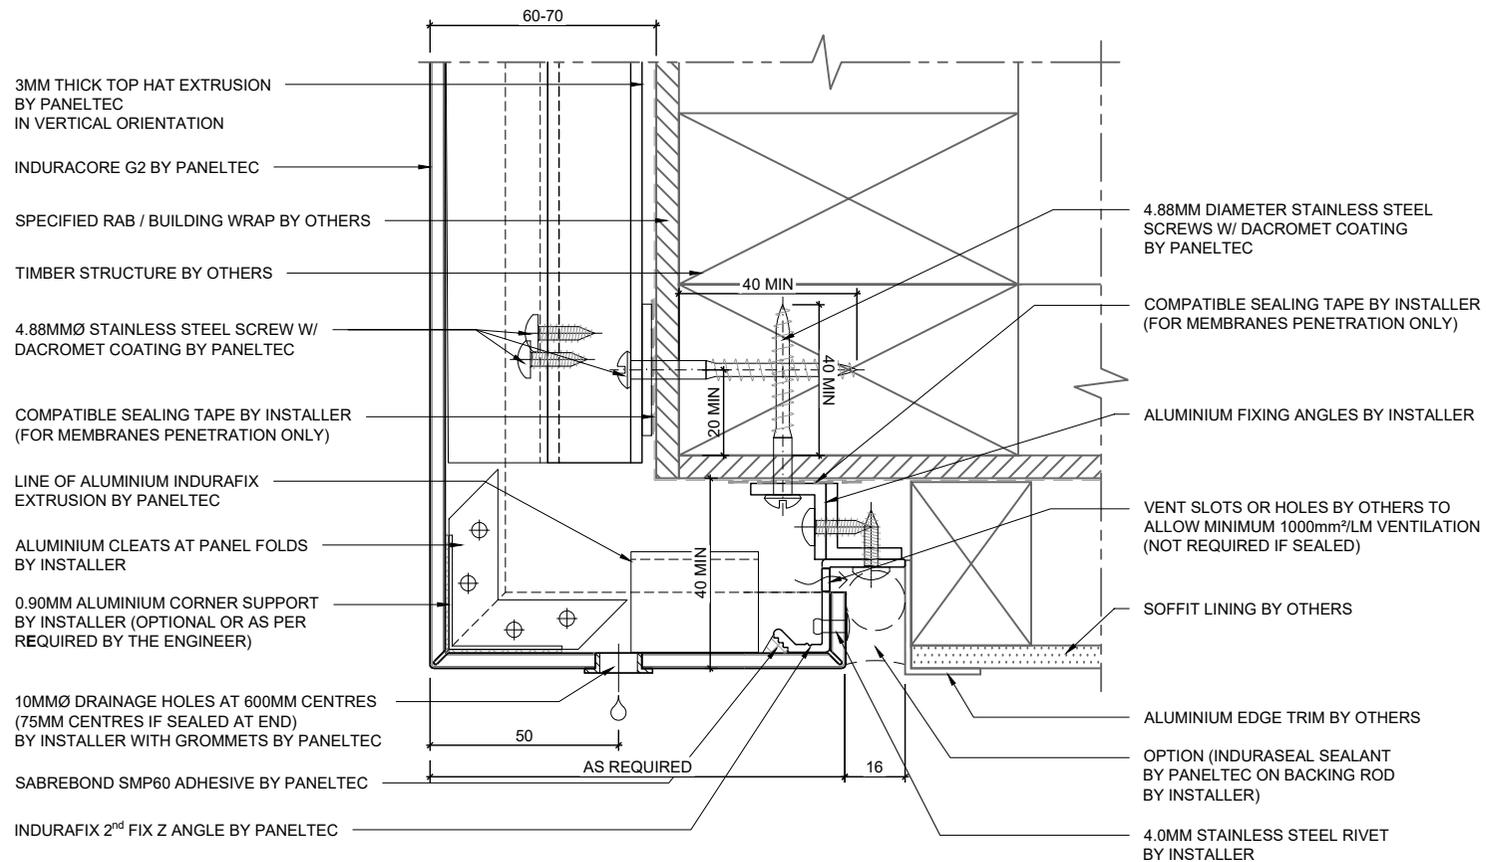



IMPORTANT NOTES:


- RECOMMENDED TO HAVE THE PANEL BOTTOM SLOPING @1.5° TOWARDS THE SIDE WHERE THE DRAIN HOLE IS LOCATED TO AVOID RISK OF PONDING.

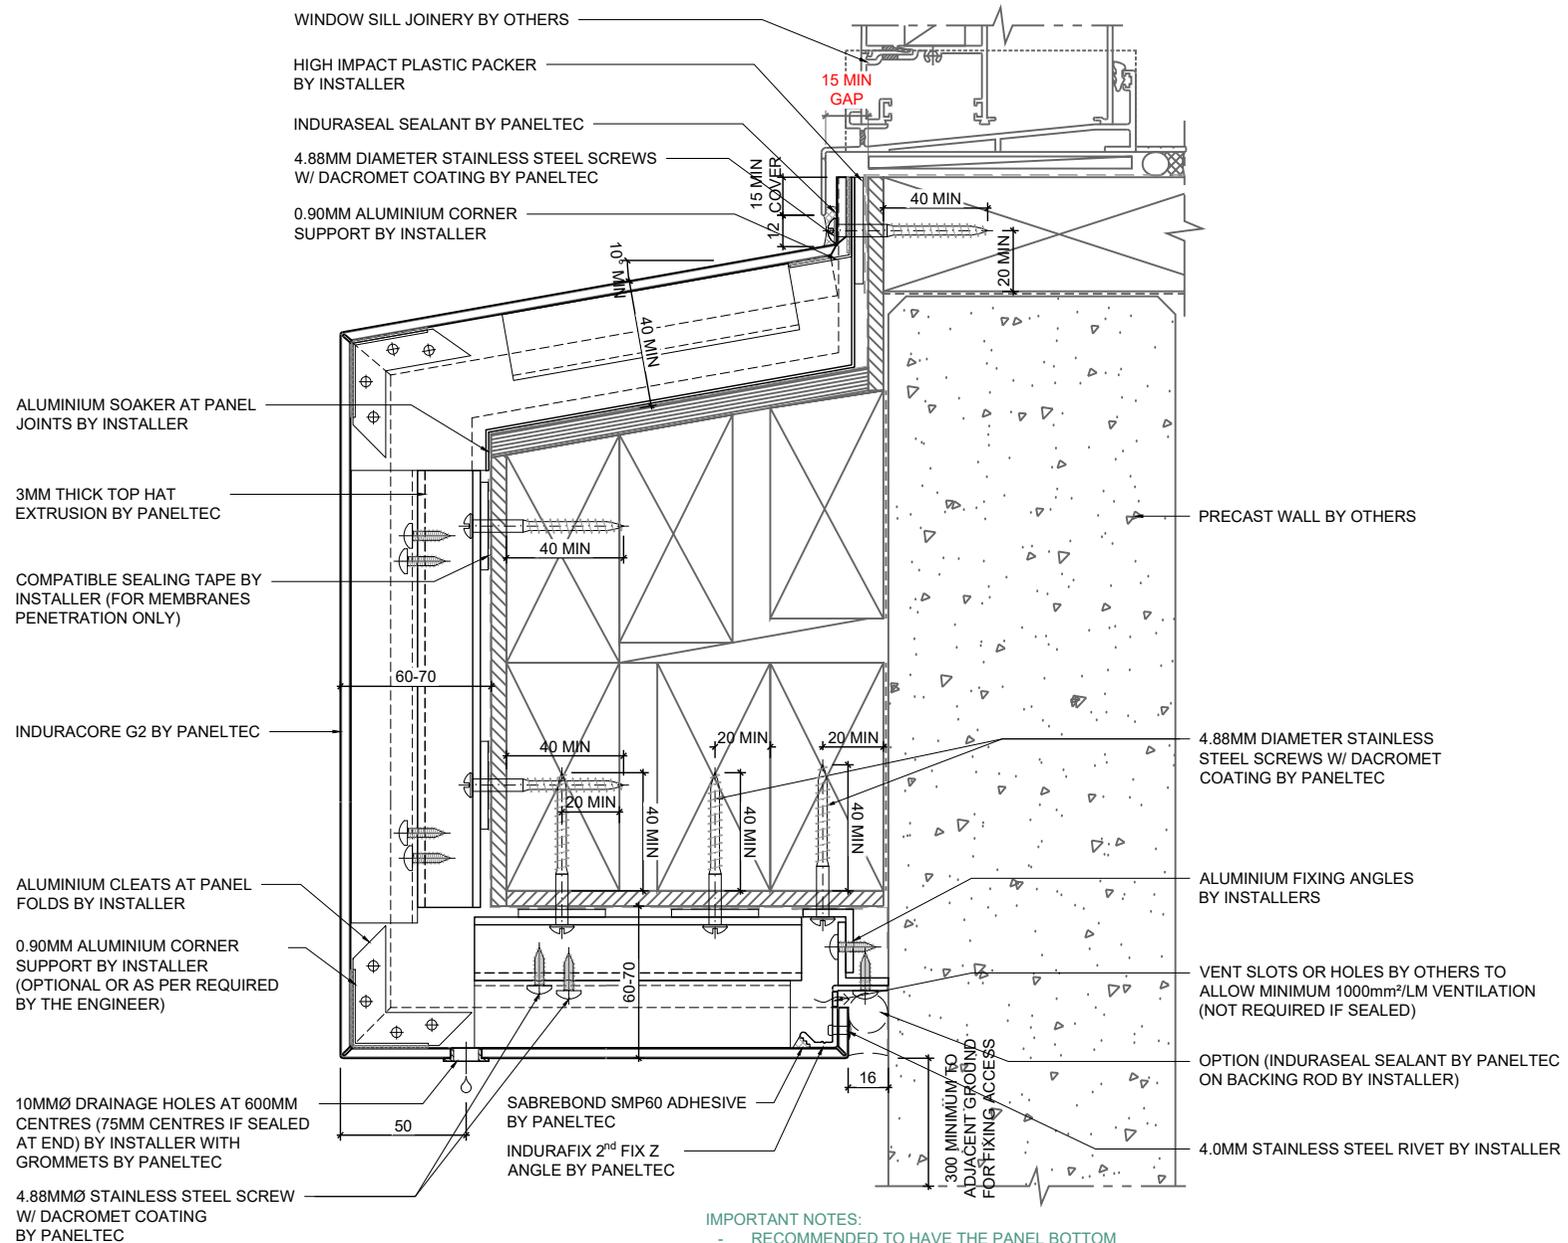



IMPORTANT NOTES:
 - RECOMMENDED TO HAVE THE PANEL BOTTOM SLOPING @ 1.5° TOWARDS THE SIDE WHERE THE DRAIN HOLE IS LOCATED TO AVOID RISK OF PONDING.

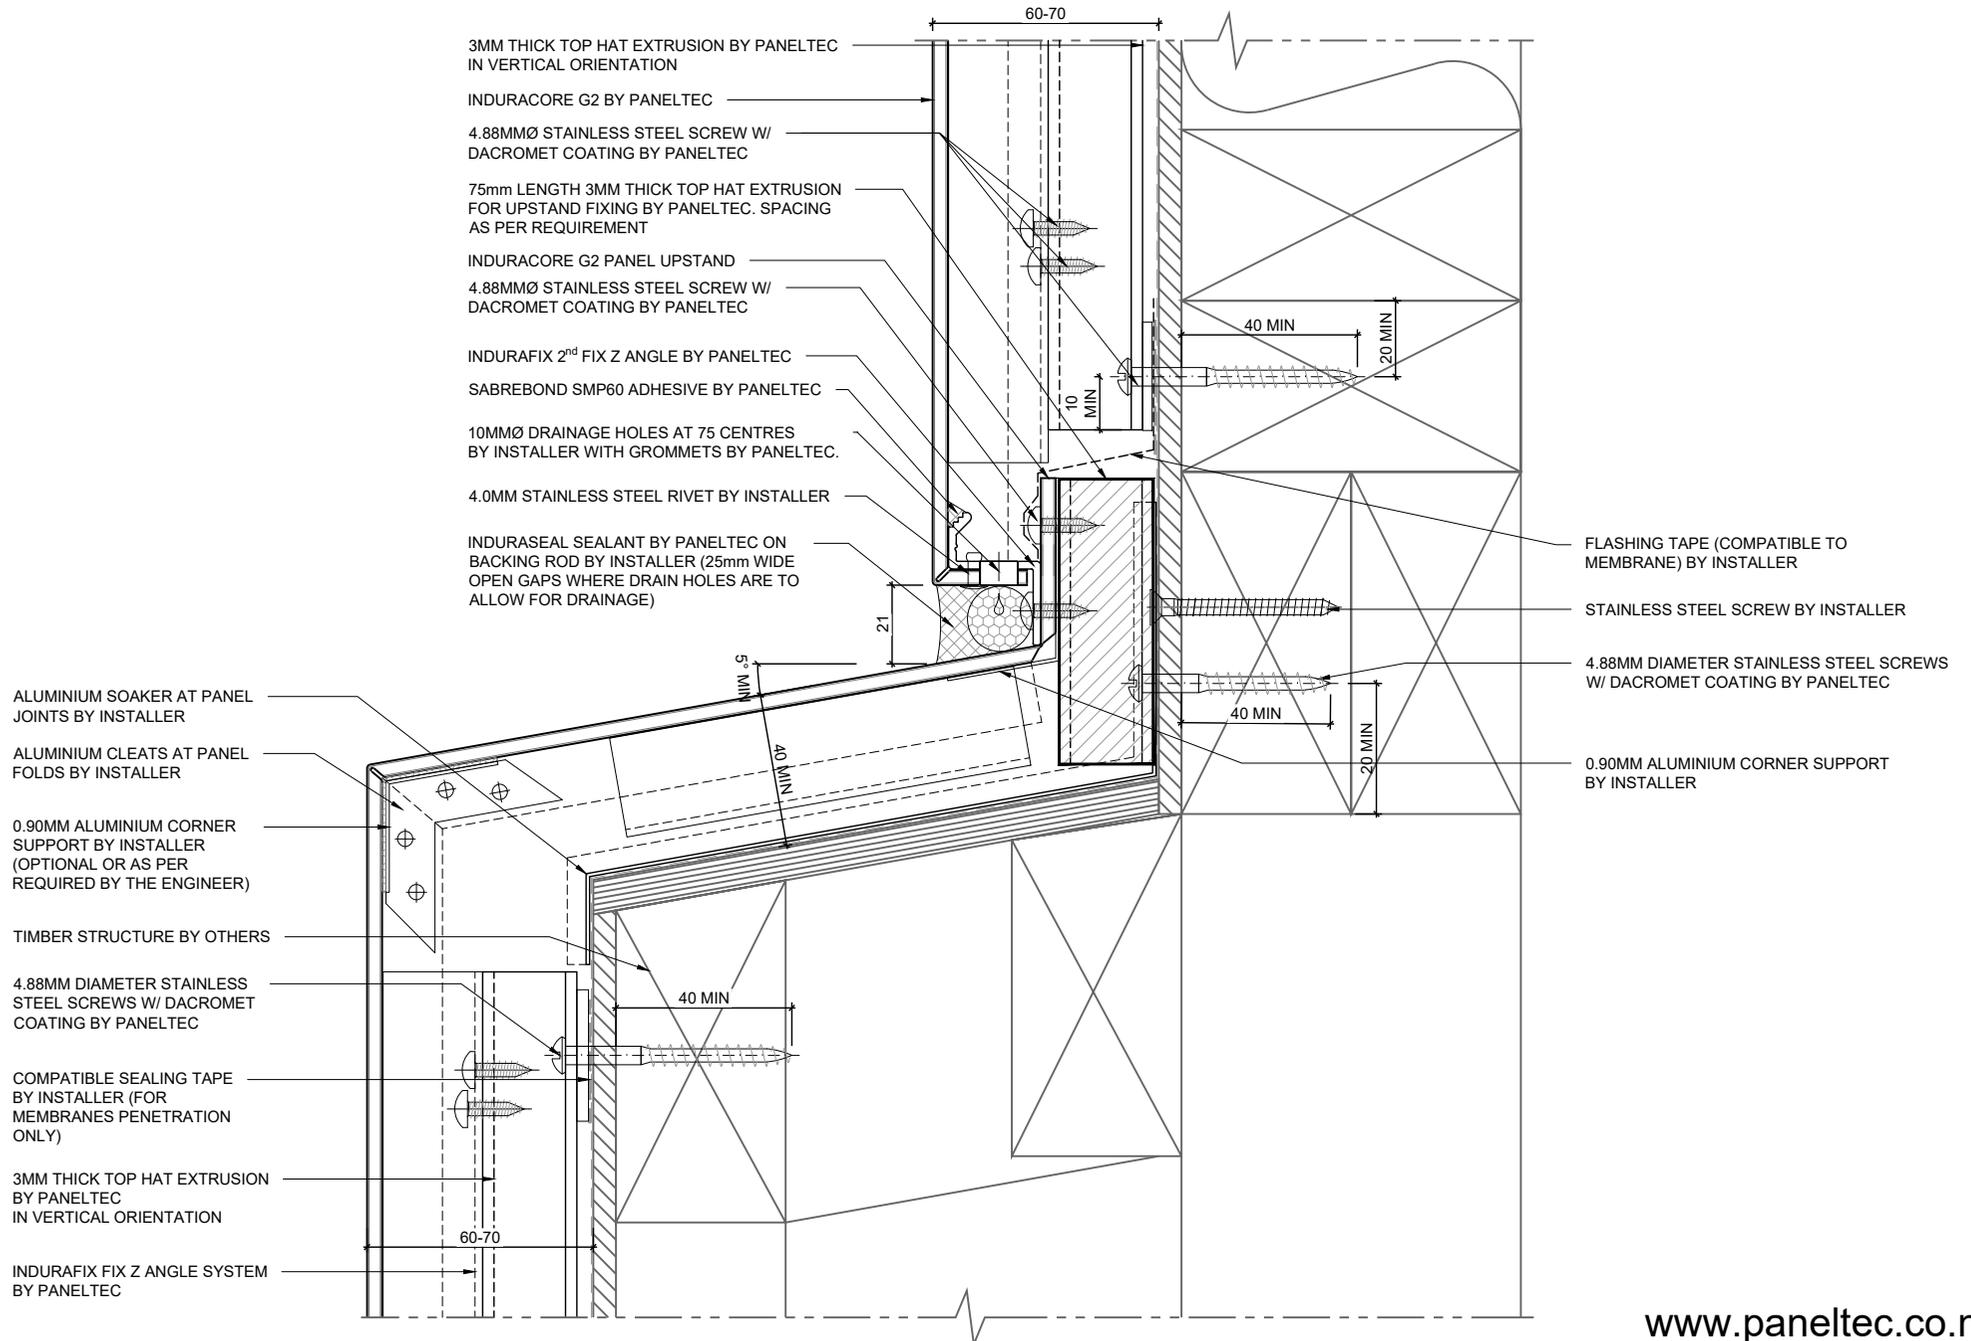


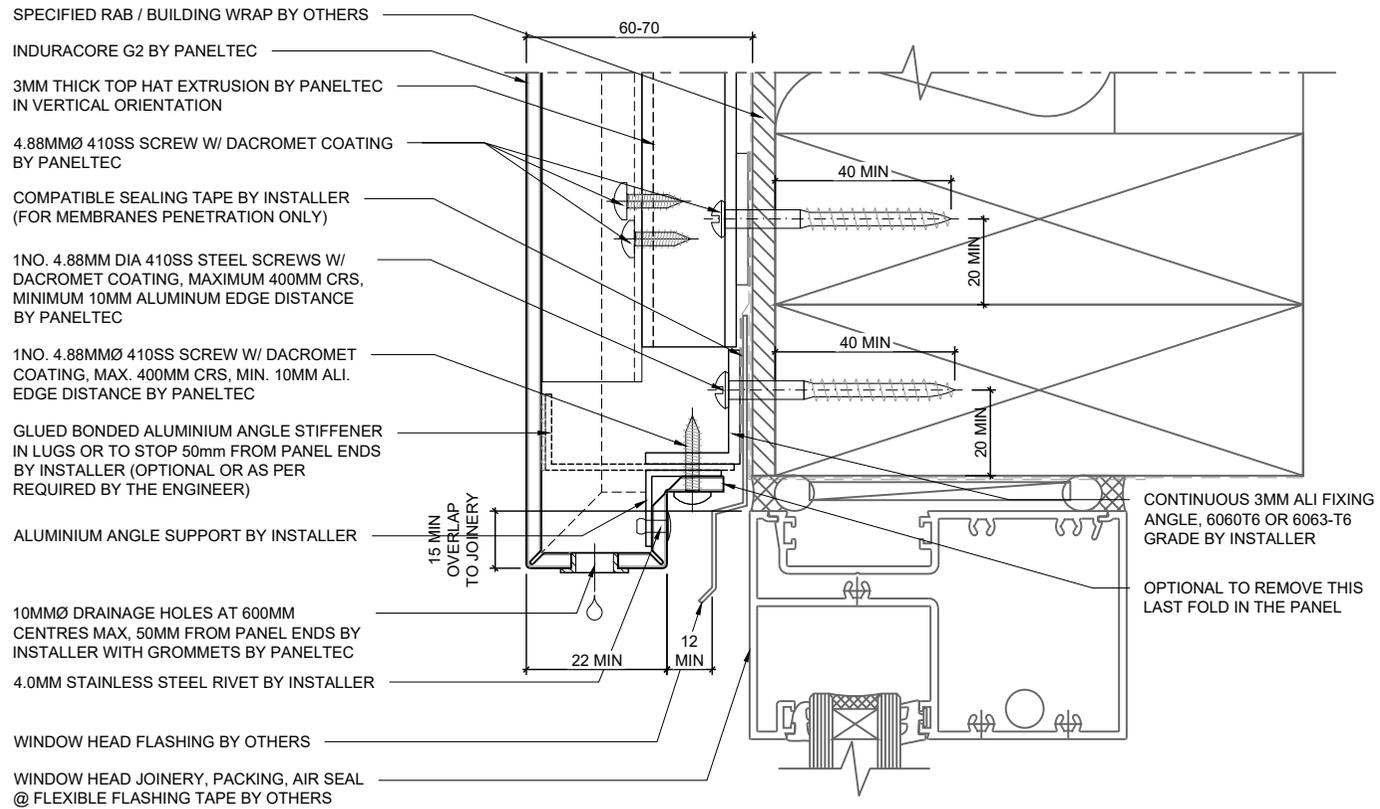


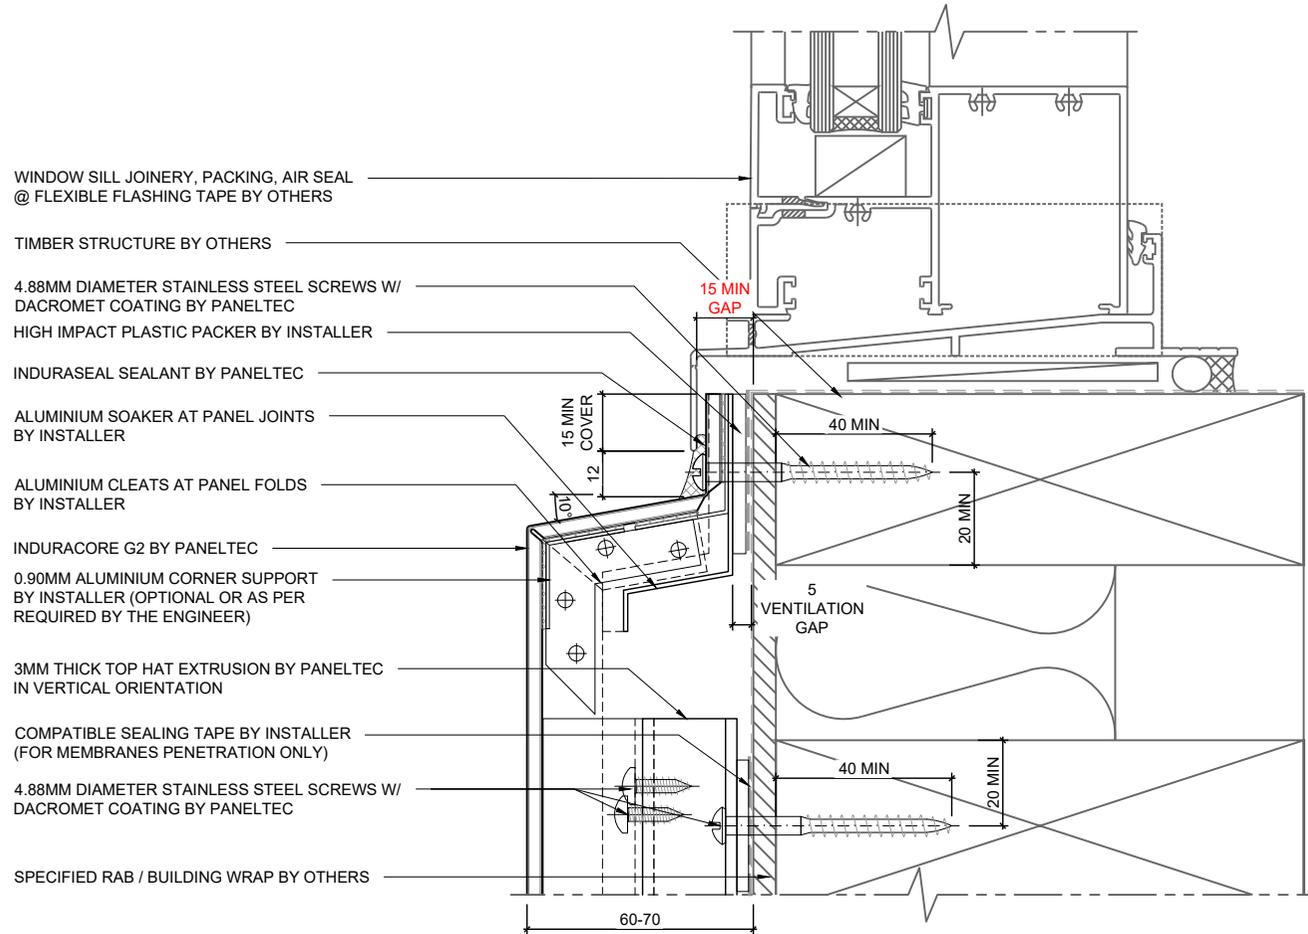


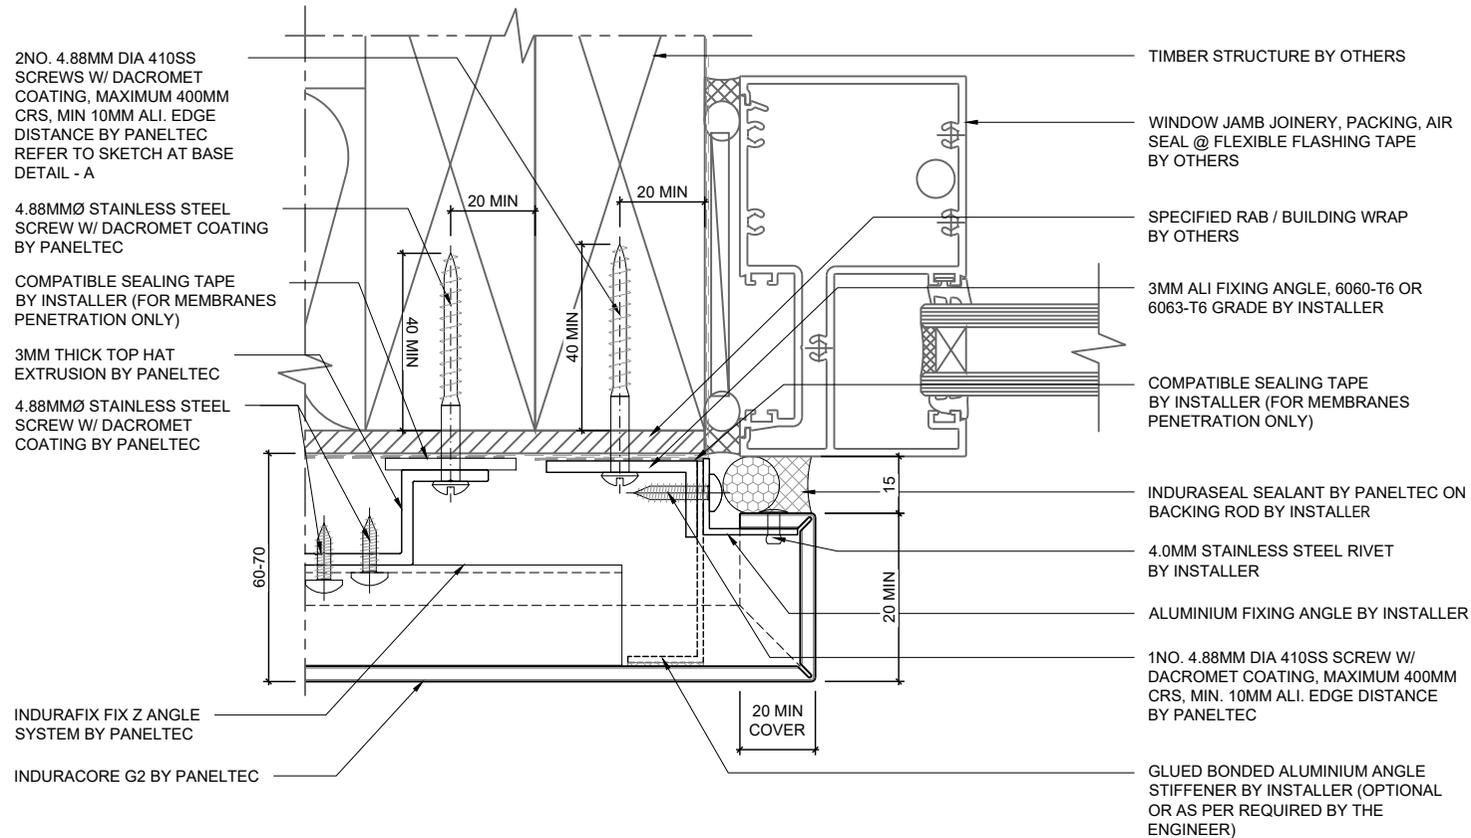


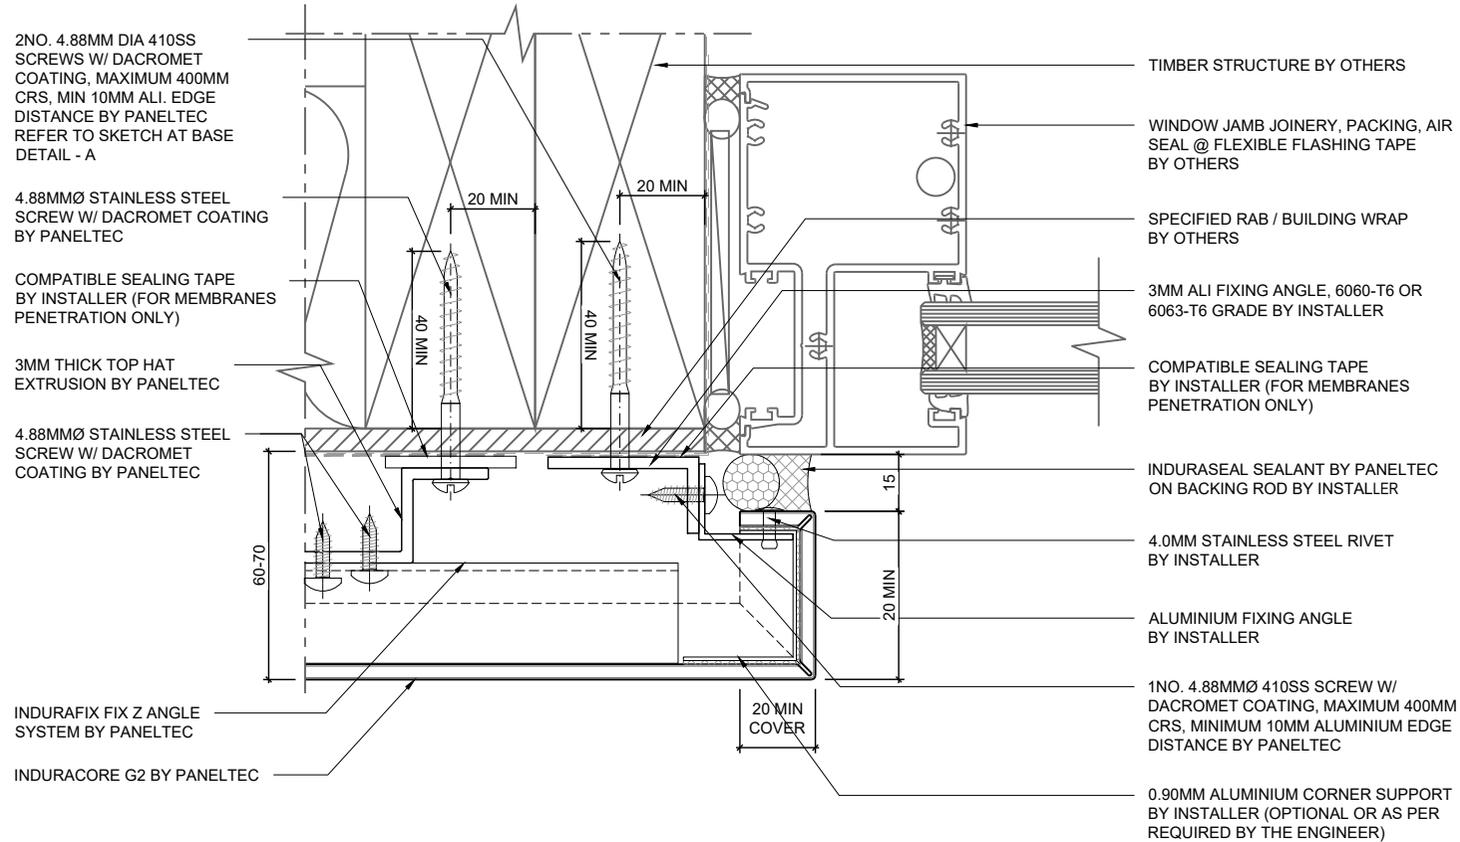


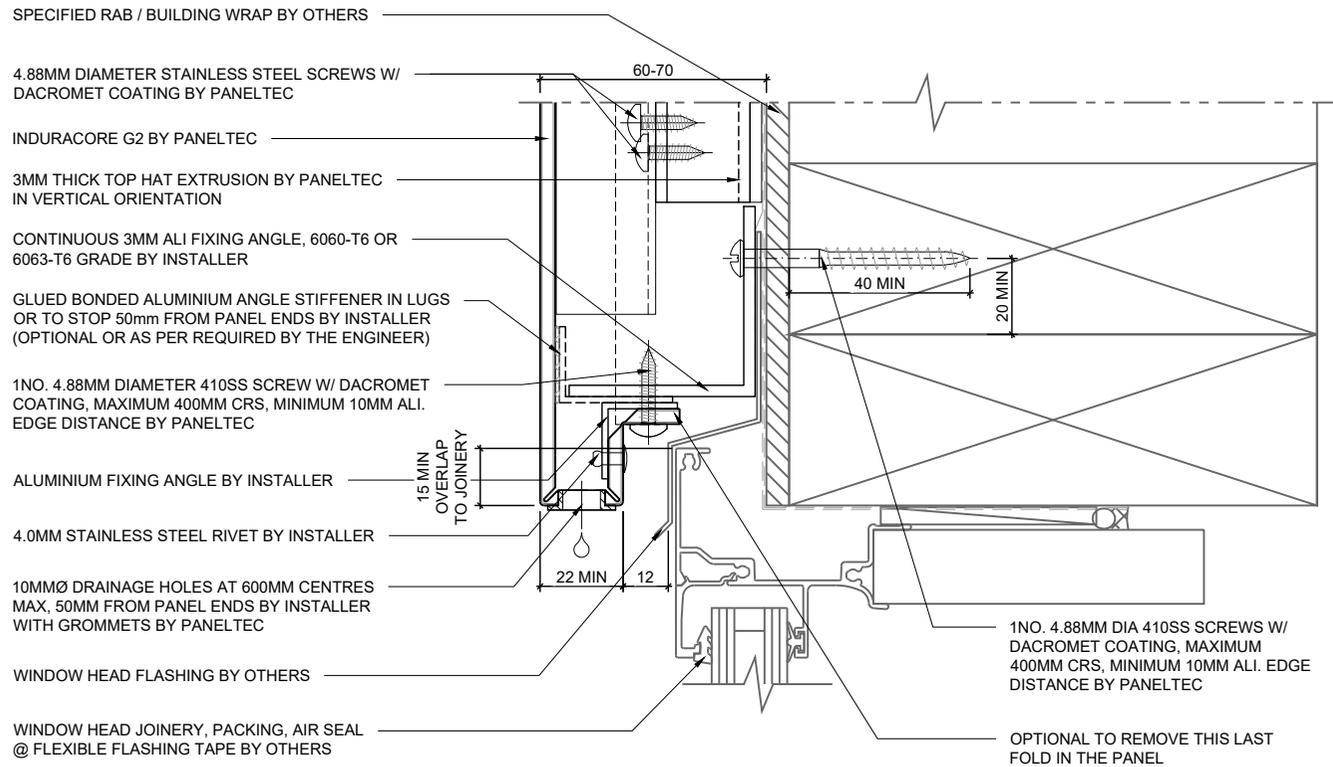


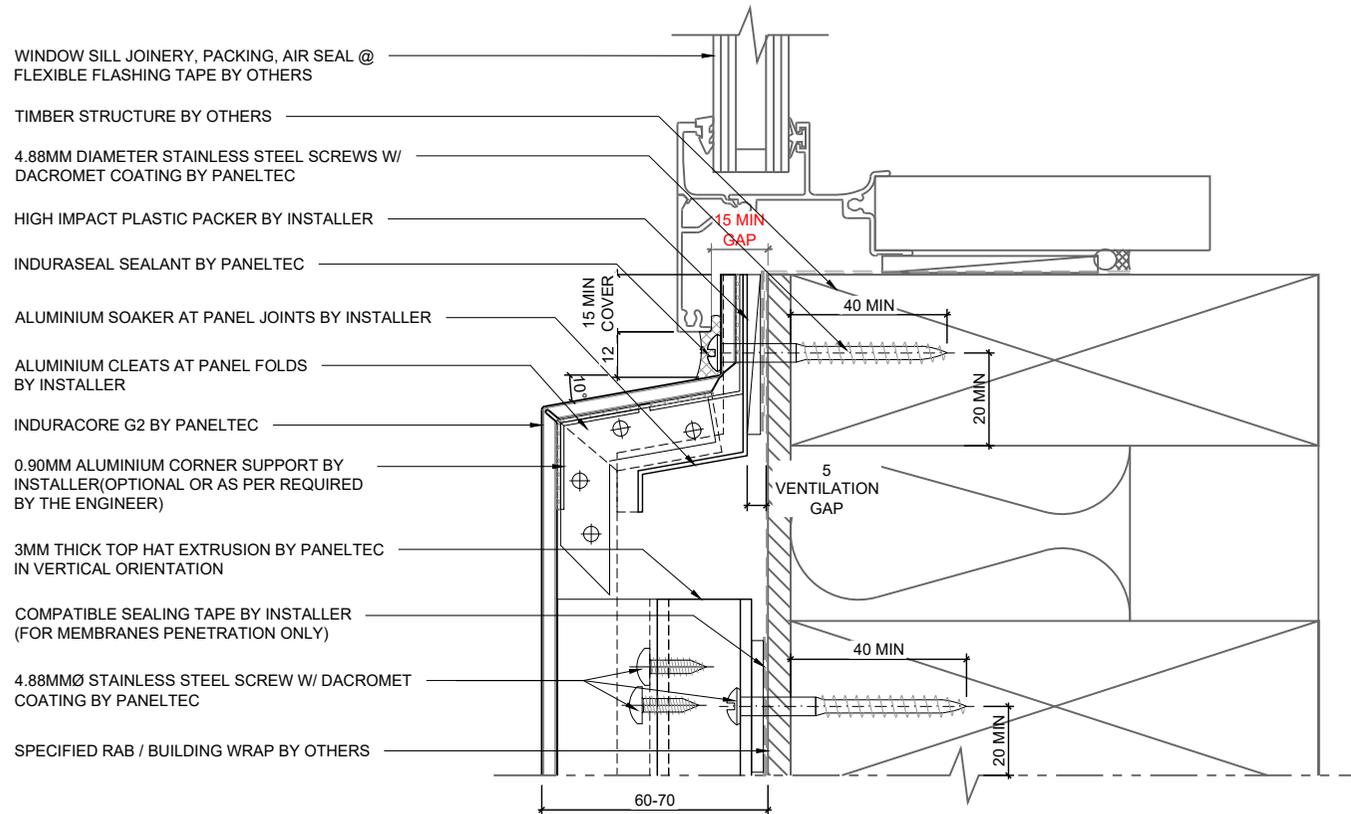


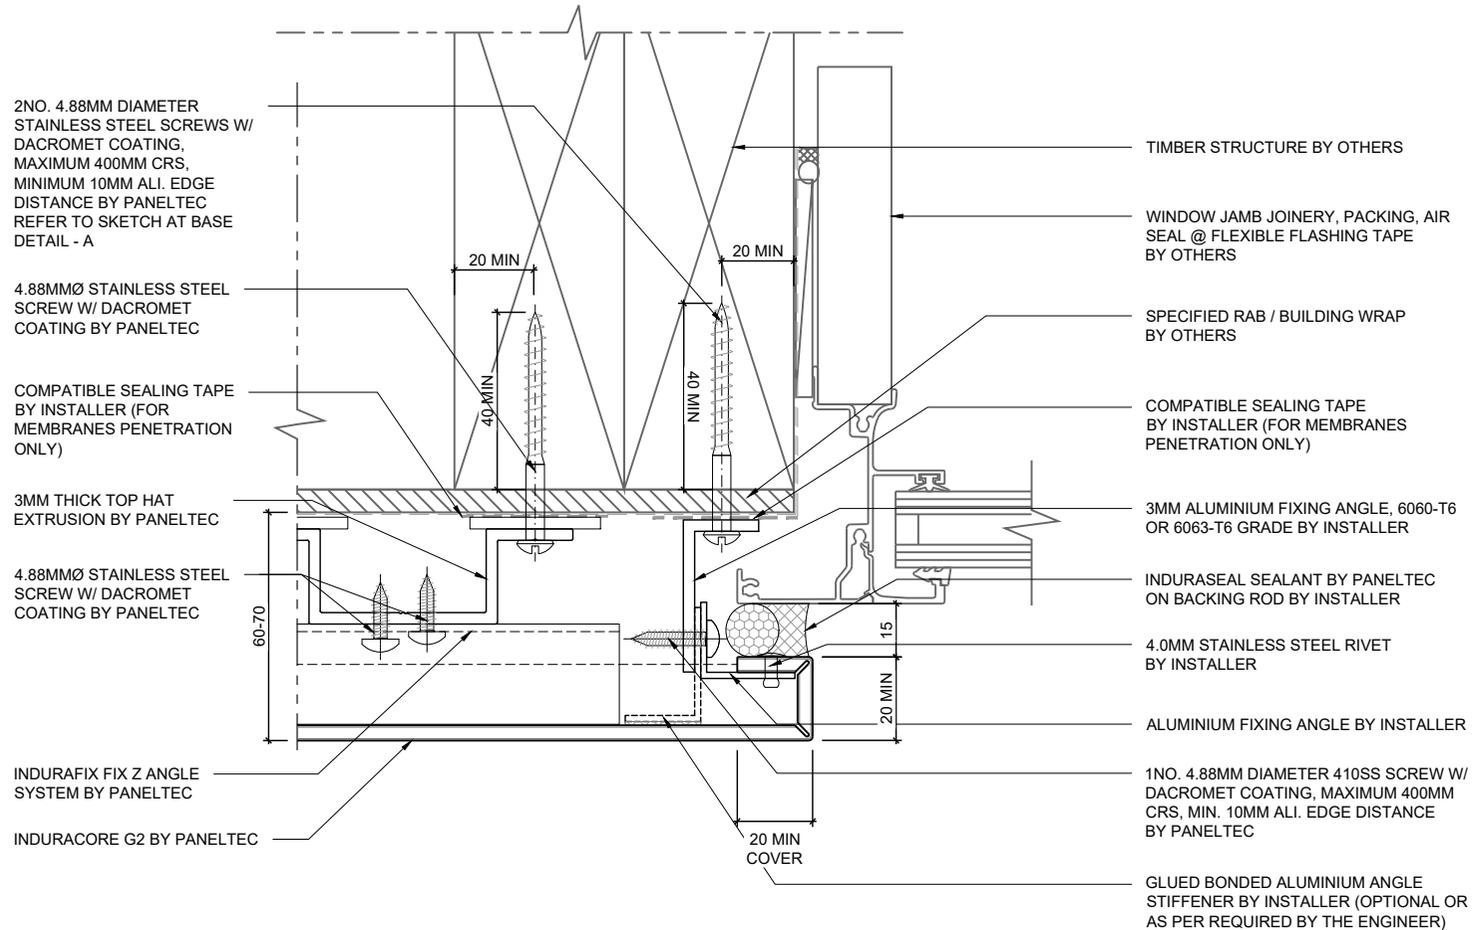


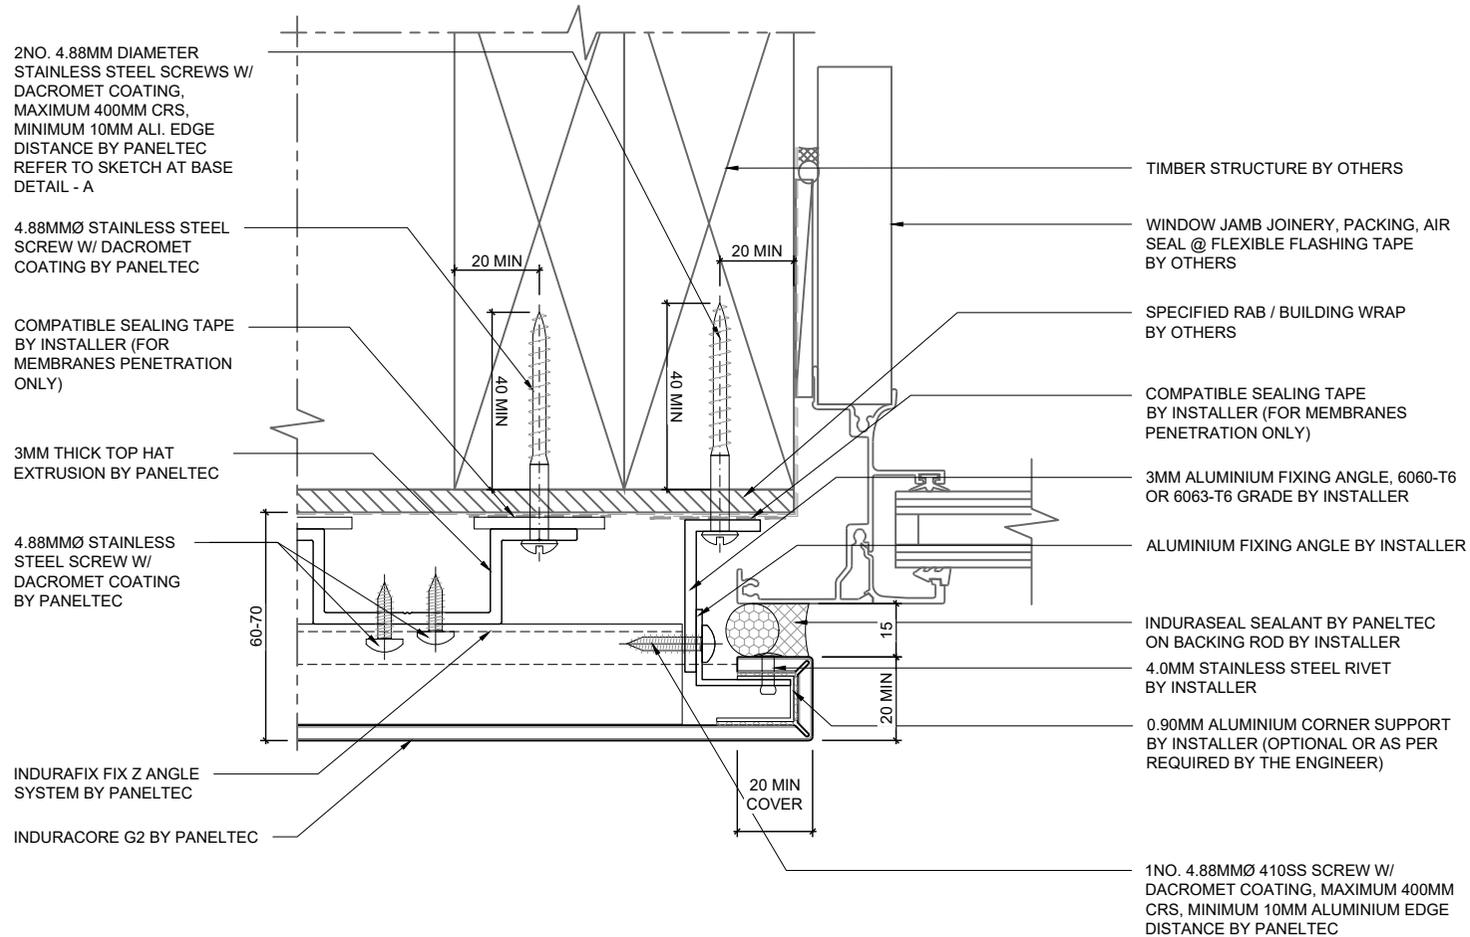


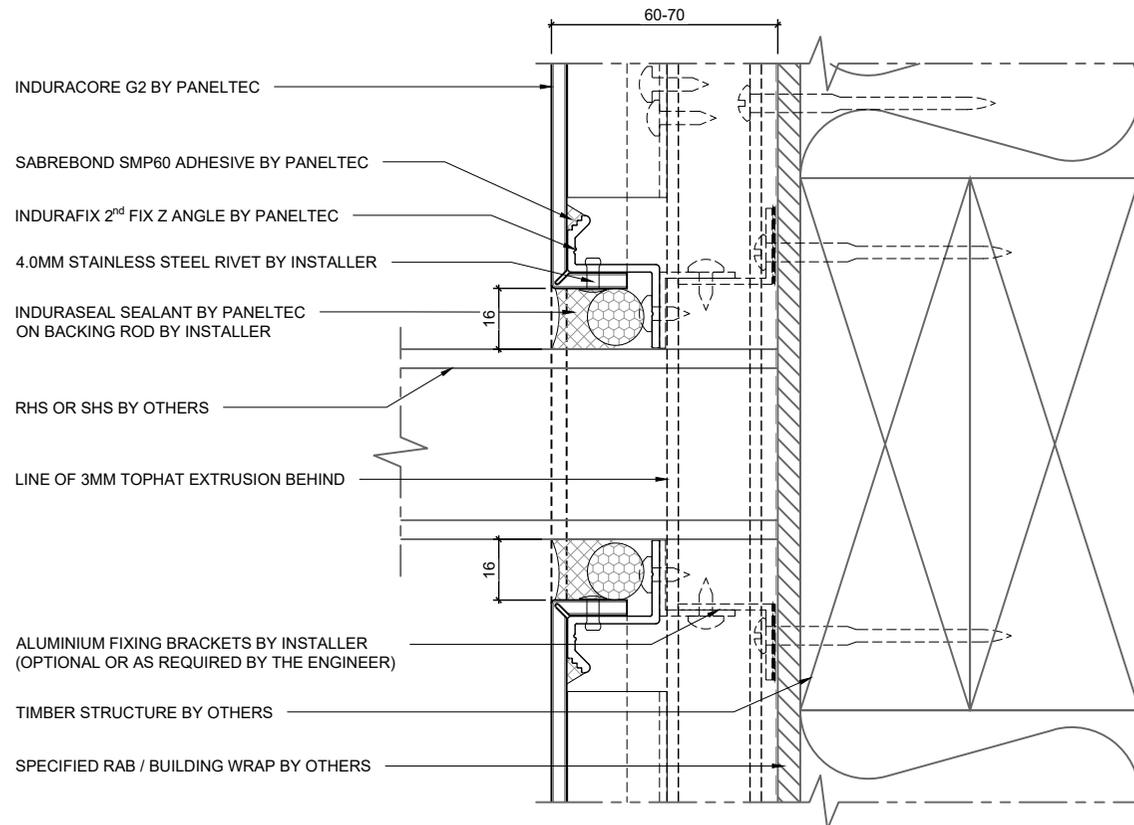


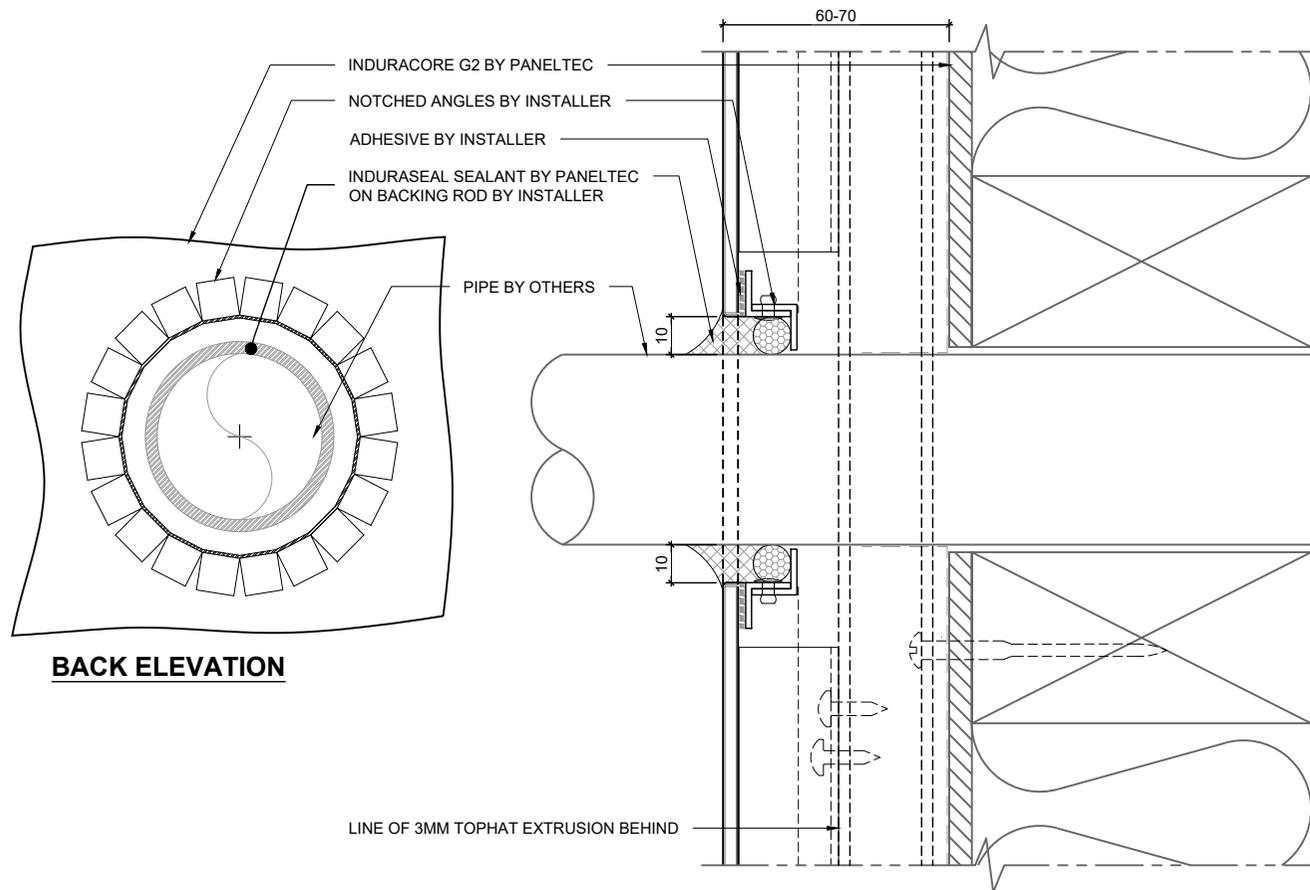

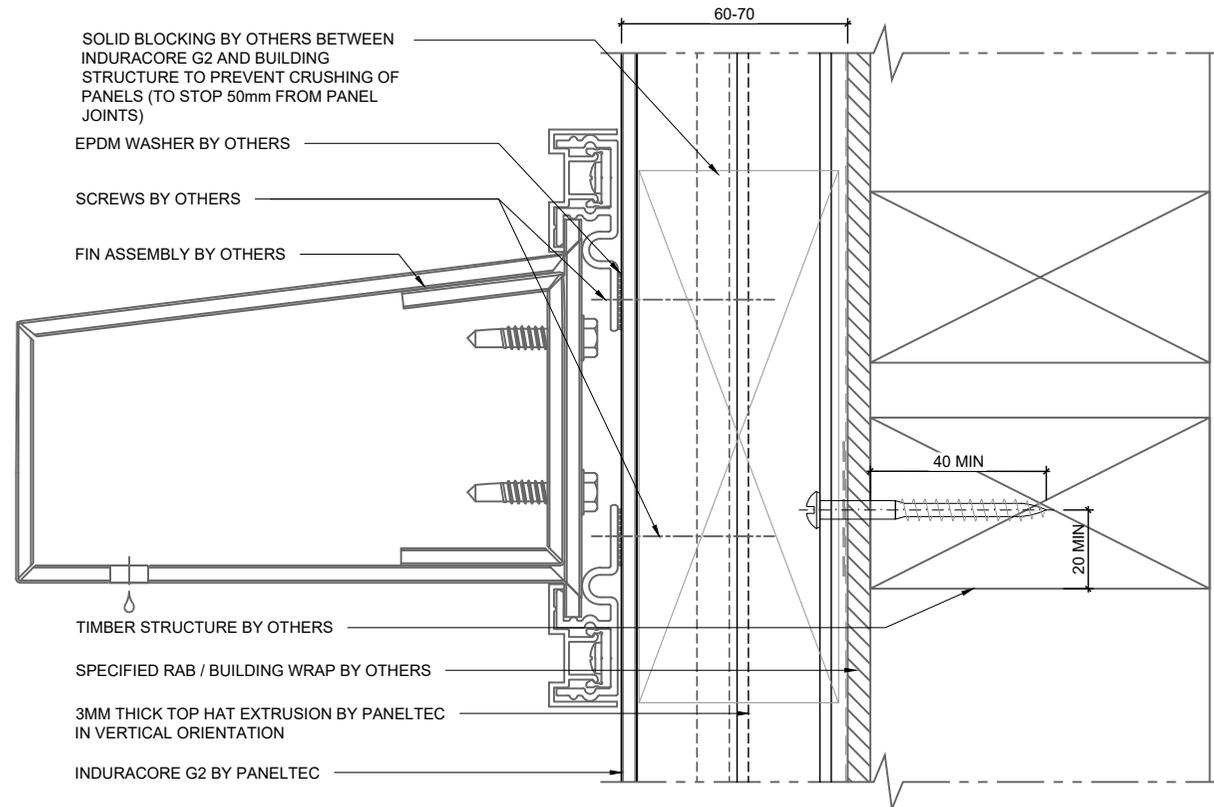

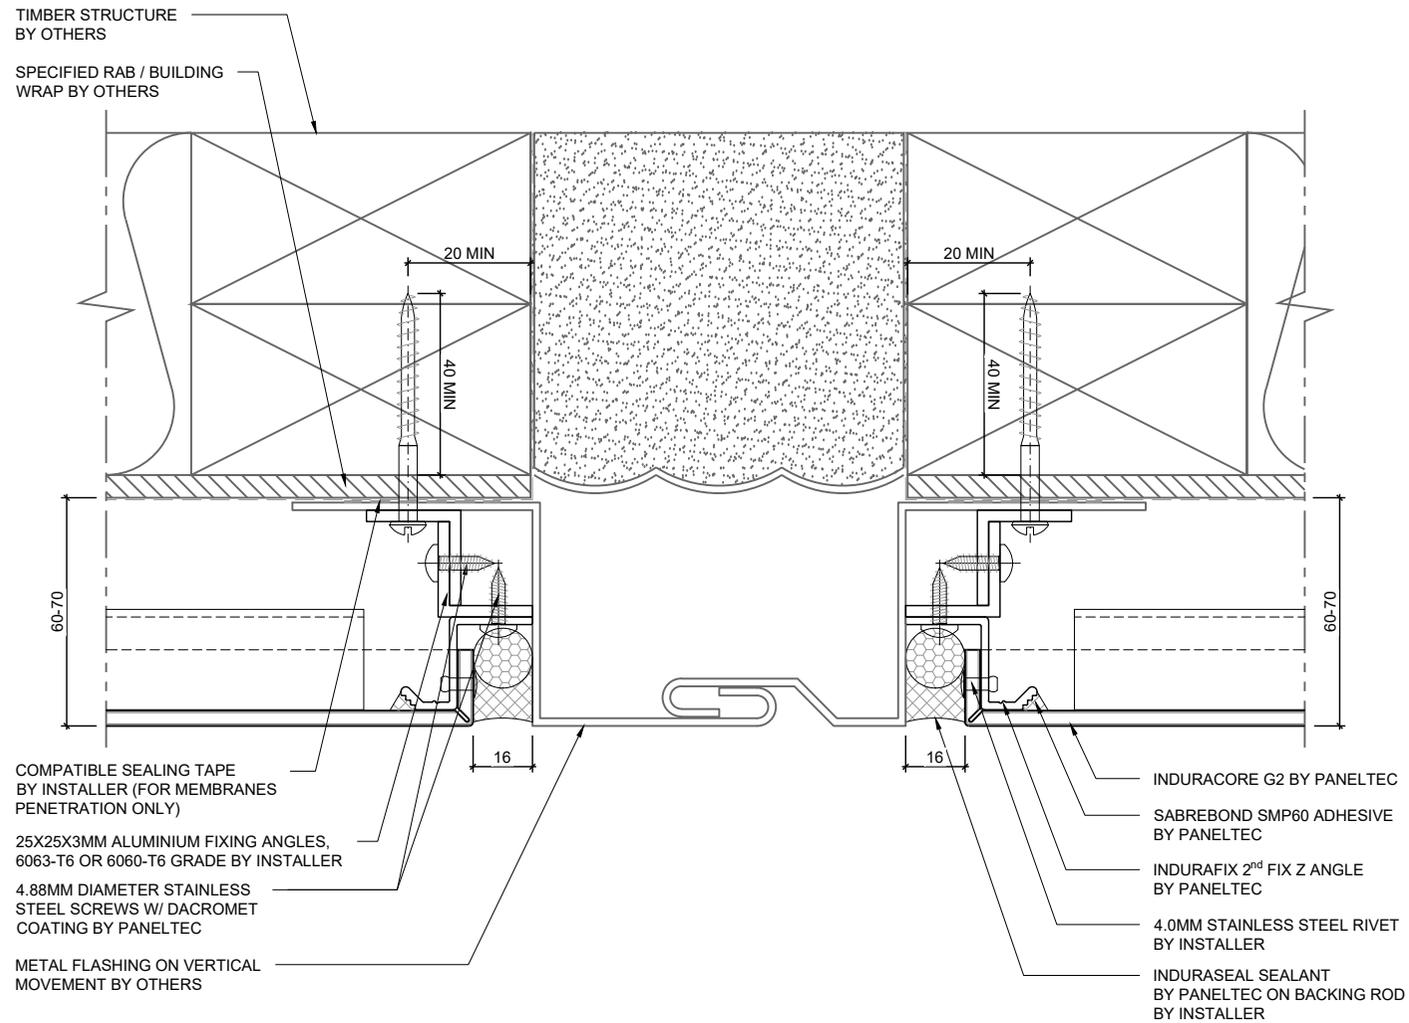

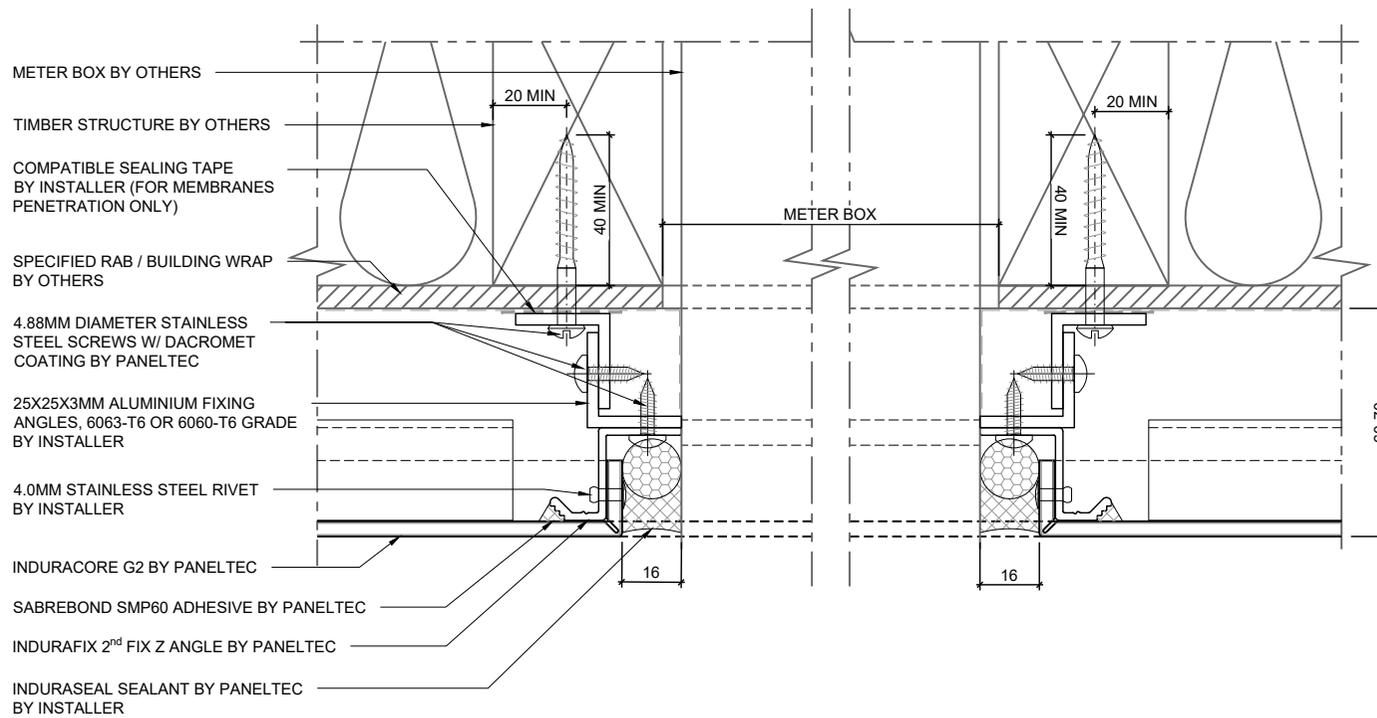

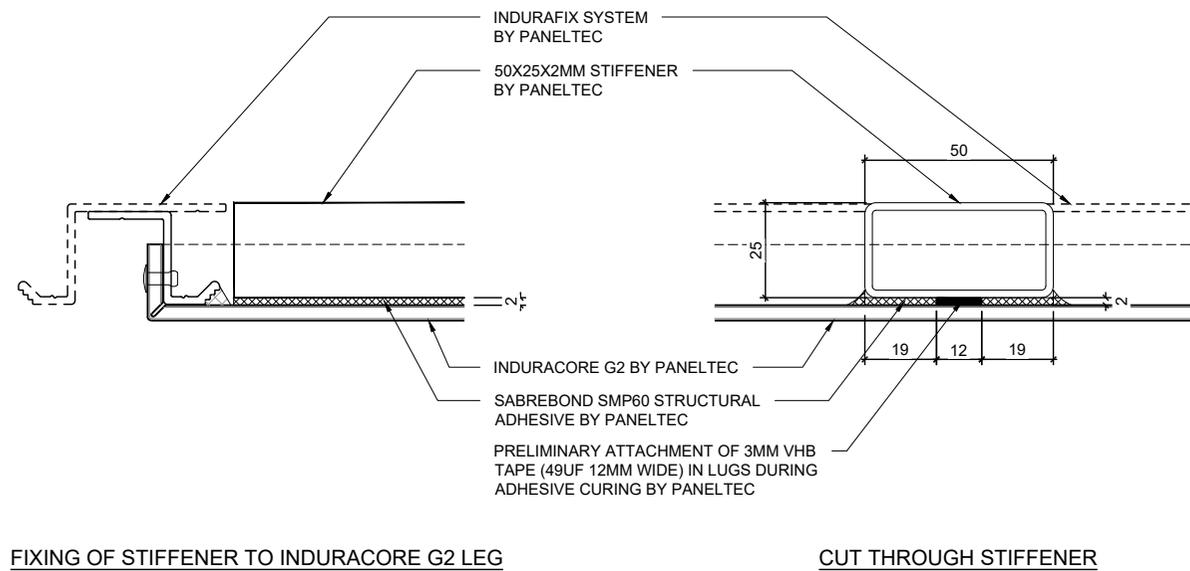



Auckland Office
5 Piermark Drive
Rosedale
Auckland 0632
0508 726 358

Head Office
10 Mako Street,
Dargaville
09 439 4357

info@paneltec.co.nz
www.paneltec.co.nz

 **Paneltec**
NEW ZEALAND LTD